

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

5. Lease Serial No.

UTU-01196-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.

FEDERAL 1022-15L

9. API Well No.

43-047-38924

10. Field and Pool, or Exploratory

NATURAL BUTTES

11. Sec., T., R., M., or Blk, and Survey or Area

SEC. 15, T10S, R22E

12. County or Parish

UINTAH

13. State

UTAH

1a. Type of Work: ☒ DRILL

☐ REENTER

b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other

☐ Single Zone ☒ Multiple Zone

2. Name of Operator

KERR MCGEE OIL & GAS ONSHORE LP

3A. Address

1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)

(435) 781-7024

4. Location of Well (Report location clearly and in accordance with any State requirements.)*

At surface

NWSW 1837'FSL, 776'FWL 633966X

39.946674

At proposed prod. Zone

4422806Y

-109.431864

14. Distance in miles and direction from nearest town or post office*

36 MILES SOUTH OF OURAY, UTAH

15. Distance from proposed*

location to nearest
property or lease line, ft.
(Also to nearest drig. unit line, if any)

776'

16. No. of Acres in lease

320.00

17. Spacing Unit dedicated to this well

40.00

18. Distance from proposed location*
to nearest well, drilling, completed,
applied for, on this lease, ft.

REFER TO
TOPO C

19. Proposed Depth

8480'

20. BLM/BIA Bond No. on file

BOND NO. WY-2357

21. Elevations (Show whether DF, KDB, RT, GL, etc.)

5191' UNGRADED GL

22. Approximate date work will start*

23. Estimated duration


24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office.

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be required by the authorized office.

25. Signature



Name (Printed/Typed)

SHEILA UPCHEGO

Date

12/4/2006

Title

SENIOR LAND ADMIN SPECIALIST

Approved by Signature



Name (Printed/Typed)

BRADLEY G. HILL

Date

12-14-06

Title

Office ENVIRONMENTAL MANAGER

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

RECEIVED

DEC 11 2006

Federal Approval of this
Action is Necessary

DIV. OF OIL, GAS & MINING


T10S, R22E, S.L.B.&M.

Kerr-McGee Oil & Gas Onshore LP

Well location, FEDERAL #1022-15L, located as shown in the NW 1/4 SW 1/4 of Section 15, T10S, R22E, S.L.B.&M. Uintah County, Utah.


BASIS OF ELEVATION

TWO WATER TRIANGULATION STATION LOCATED IN THE NW 1/4 OF SECTION 1, T10S, R21E, S.L.B.&M. TAKEN FROM THE BIG PACK MTN NE QUADRANGLE, UTAH, UTAH COUNTY, 7.5 MINUTE SERIES (TOPOGRAPHICAL MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 5238 FEET.

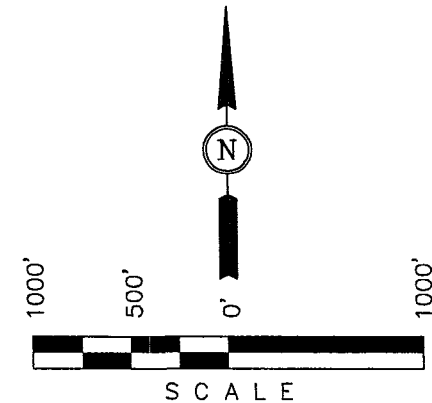


CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE DESCRIBED LAND IS CORRECTLY LOCATED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



UINTAH ENGINEERING & LAND SURVEYING
85 SOUTH 200 EAST - VERNAL, UTAH 84078
(435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 05-17-06	DATE DRAWN: 05-22-06
PARTY J.R. A.A. C.H.	REFERENCES G.L.O. PLAT	
WEATHER WARM	FILE Kerr-McGee Oil & Gas Onshore LP	

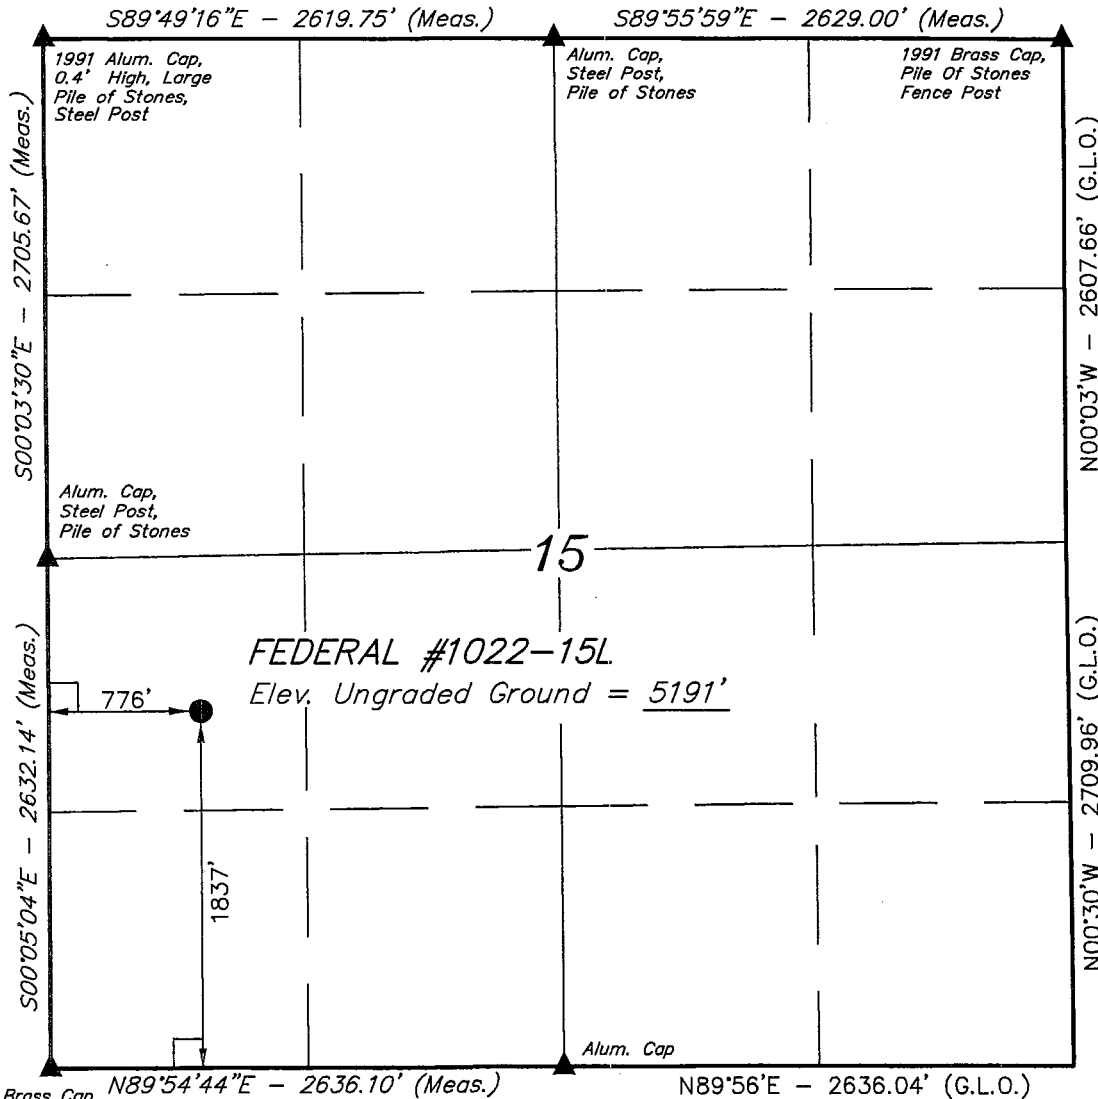

BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(NAD 83)
LATITUDE = 39°56'47.94" (39.946650)
LONGITUDE = 109°25'27.25" (109.424236)
(NAD 27)
LATITUDE = 39°56'48.06" (39.946683)
LONGITUDE = 109°25'24.80" (109.423556)

1991 Brass Cap, 0.5' High, Pile of Stones, Steel Post

Alum. Cap

Alum. Cap, Steel Post, Pile of Stones

1991 Alum. Cap, 0.4' High, Large Pile of Stones, Steel Post

Alum. Cap, Steel Post, Pile of Stones

1991 Brass Cap, Pile of Stones Fence Post

S89°49'16"E - 2619.75' (Meas.)

S89°55'59"E - 2629.00' (Meas.)

S00°03'30"E - 2705.67' (Meas.)

N00°03'W - 2607.66' (G.L.O.)

N00°30'W - 2709.96' (G.L.O.)

N89°54'44"E - 2636.10' (Meas.)

N89°56'E - 2636.04' (G.L.O.)

1991 Brass Cap, 0.5' High, Pile of Stones, Steel Post

**FEDERAL 1022-15L
NW/SW SEC. 15, T10S, R22E
UINTAH COUNTY, UTAH
UTU-01196-A**

ONSHORE ORDER NO. 1

DRILLING PROGRAM

1. Estimated Tops of Important Geologic Markers:

<u>Formation</u>	<u>Depth</u>
Uinta	0- Surface
Green River	1091'
Top of Birds Nest Water	1301'
Mahogany	1875'
Wasatch	4135'
Mesaverde	6463'
MVU2	7478'
MVL1	7997'
TD	8480'

2. Estimated Depths of Anticipated Water, Oil, Gas, or Mineral Formations:

<u>Substance</u>	<u>Formation</u>	<u>Depth</u>
Water	Green River	1091'
	Top of Birds Nest Water	1301'
	Mahogany	1875'
	Wasatch	4135'
Gas	Mesaverde	6463'
Gas	MVU2	7478'
Gas	MVL1	7997'
Water	N/A	
Other Minerals	N/A	

3. Pressure Control Equipment (Schematic Attached)

Please refer to the attached Drilling Program.

4. Proposed Casing & Cementing Program:

Please refer to the attached Drilling Program.

5. Drilling Fluids Program:

Please refer to the attached Drilling Program.

6. Evaluation Program:

Please refer to the attached Drilling Program.

7. **Abnormal Conditions:**

Maximum anticipated bottomhole pressure calculated at 8480' TD, approximately equals 5258 psi (calculated at 0.62 psi/foot).

Maximum anticipated surface pressure equals approximately 3402 psi (bottomhole pressure minus the pressure of a partially evacuated hole calculated at 0.22 psi/foot).

8. **Anticipated Starting Dates:**

Drilling is planned to commence immediately upon approval of this application.

9. **Variances:**

Please refer to the attached Drilling Program.

10. **Other Information:**

Please refer to the attached Drilling Program.



KERR-McGEE OIL & GAS ONSHORE LP **DRILLING PROGRAM**

COMPANY NAME KERR-McGEE OIL & GAS ONSHORE LP DATE December 4, 2006
WELL NAME FEDERAL 1022-15L TD 8,480' MD/TVD
FIELD Natural Buttes COUNTY Uintah STATE Utah ELEVATION 5,186' GL KB 5,201'
SURFACE LOCATION NWSW SECTION 15, T10S, R22E BHL Straight Hole
Latitude: 39.946650 Longitude: 109.424236
OBJECTIVE ZONE(S) Wasatch/Mesaverde
ADDITIONAL INFO Regulatory Agencies: BLM (SURF & MINERALS), UDOGM, Tri-County Health Dept.

GEOLOGICAL			MECHANICAL		
LOGS	FORMATION	DEPTH	HOLE SIZE	CASING SIZE	MUD WEIGHT
		40'		14"	
			12-1/4"	9-5/8", 32.3#, H-40, STC	Air mist
Catch water sample, if possible, from 0 to 4,135'					
	Green River @	1,091'			
	Top of Birds Nest Water @	1301'			
	Preset f/ GL @				
	1,810' MD				
Note: 12.25" surface hole will usually be drilled ±400' below the bottom of lost circulation zone. Drilled depth may be ±200' of the estimated set depth depending on the actual depth of the loss zone.					
	Mahogany (1,875'			
Mud logging program TBD Open hole logging program f/ TD - surf csg					
	Wasatch @	4,135'	7-7/8"	4-1/2", 11.6#, I-80 or equivalent LTC casing	Water/Fresh Water Mud 8.3-11.2 ppg
	Mverde @	6,463'			
	MVU2 @	7,478'			
	MVL1 @	7,997'			
	TD @	8,480'			Max anticipated Mud required 11.2 ppg



KERR-McGEE OIL & GAS ONSHORE LP DRILLING PROGRAM

CASING PROGRAM

CASING PROGRAM						DESIGN FACTORS		
	SIZE	INTERVAL	WT.	GR.	CPLG.	BURST	COLLAPSE	TENSION
CONDUCTOR	14"	0-40'				2270	1370	254000
SURFACE	9-5/8"	0 to 1810	32.30	H-40	STC	0.74*****	1.62	4.96
						7780	6350	201000
PRODUCTION	4-1/2"	0 to 8480	11.60	I-80	LTC	2.53	1.29	2.34

- 1) Max Anticipated Surf. Press. (MASP) (Surface Casing) = (Pore Pressure at next csg point - (0.22 psi/ft-partial evac gradient x TVD of next csg point))
 2) MASP (Prod Casing) = Pore Pressure at TD - (.22 psi/ft-partial evac gradient x TD)
 (Burst Assumptions: TD = 11.2 ppg) .22 psi/ft = gradient for partially evac wellbore
 (Collapse Assumption: Fully Evacuated Casing, Max MW) (Tension Assumptions: Air Weight of Casing*Buoy.Fact. of water)
 MASP 3073 psi

***** Burst SF is low but csg is much stronger than formation at 2000'. EMW @ 2000' for 2270# is 21.8 ppg or 1.13 psi/ft

CEMENT PROGRAM

		FT. OF FILL	DESCRIPTION	SACKS	EXCESS	WEIGHT	YIELD
SURFACE Option 1	LEAD	500	Premium cmt + 2% CaCl + .25 pps flocele	215	60%	15.60	1.18
	TOP OUT CMT (1)	200	20 gals sodium silicate + Premium cmt + 2% CaCl + .25 pps flocele	50		15.60	1.18
	TOP OUT CMT (2)	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
SURFACE Option 2			NOTE: If well will circulate water to surface, option 2 will be utilized				
	LEAD	1500	Prem cmt + 16% Gel + 10 pps gilsonite +.25 pps Flocele + 3% salt BWOC	170	35%	11.00	3.82
	TAIL	500	Premium cmt + 2% CaCl + .25 pps flocele	180	35%	15.60	1.18
	TOP OUT CMT	as required	Premium cmt + 2% CaCl	as req.		15.60	1.18
PRODUCTION	LEAD	3,630'	Premium Lite II + 3% KCl + 0.25 pps celloflake + 5 pps gilsonite + 10% gel + 0.5% extender	400	60%	11.00	3.38
	TAIL	4,850'	50/50 Poz/G + 10% salt + 2% gel +.1% R-3	1360	60%	14.30	1.31

*Substitute caliper hole volume plus 0% excess for LEAD if accurate caliper is obtained

*Substitute caliper hole volume plus 10% excess for TAIL if accurate caliper is obtained

FLOAT EQUIPMENT & CENTRALIZERS

SURFACE	Guide shoe, 1 jt, insert float. Centralize first 3 joints with bow spring centralizers. Thread lock guide shoe.
PRODUCTION	Float shoe, 1 jt, float collar. Centralize first 3 joints & every third joint to top of tail cement with bow spring centralizers.

ADDITIONAL INFORMATION

Test casing head to 750 psi after installing. Test surface casing to 1,500 psi prior to drilling out.

BOPE: 11" 5M with one annular and 2 rams. Test to 5,000 psi (annular to 2,500 psi) prior to drilling out. Record on chart recorder & tour sheet. Function test rams on each trip. Maintain safety valve & inside BOP on rig floor at all times. Kelly to be equipped with upper & lower kelly valves.

Drop Totco surveys every 2000'. Maximum allowable hole angle is 5 degrees.

Most rigs have PVT Systems for mud monitoring. If no PVT is available, visual monitoring will be utilized.

DRILLING ENGINEER:

Brad Laney



DATE:

DRILLING SUPERINTENDENT:

Randy Bayne

DATE:

5M BOP STACK and CHOKE MANIFOLD SYSTEM

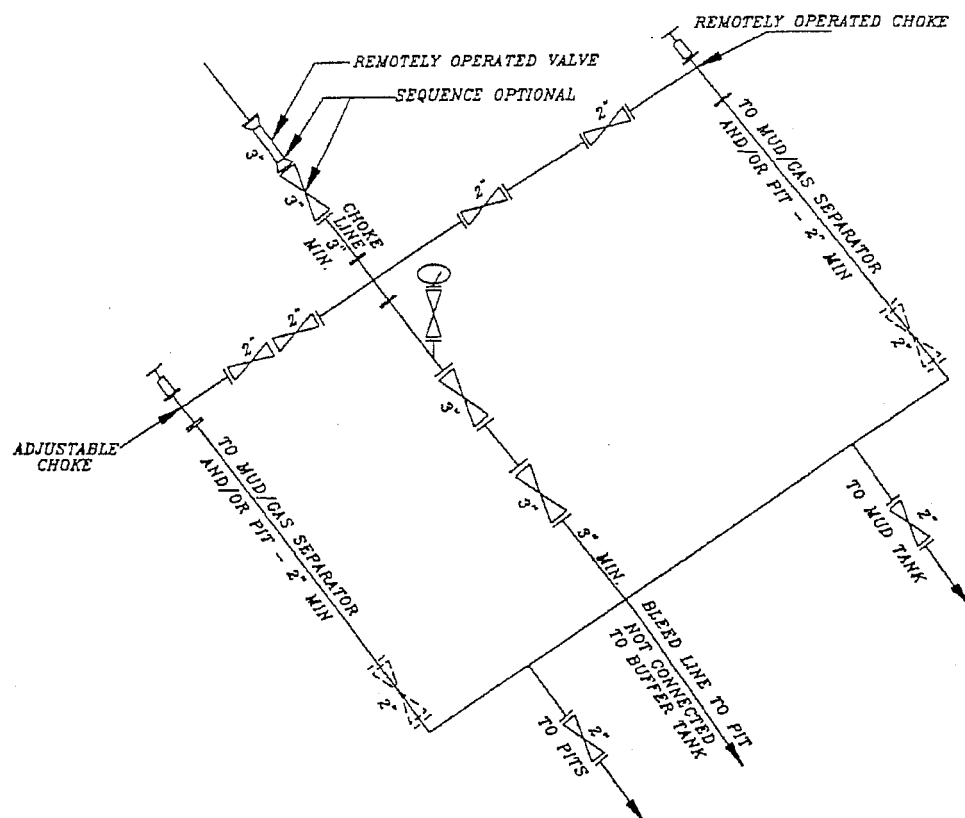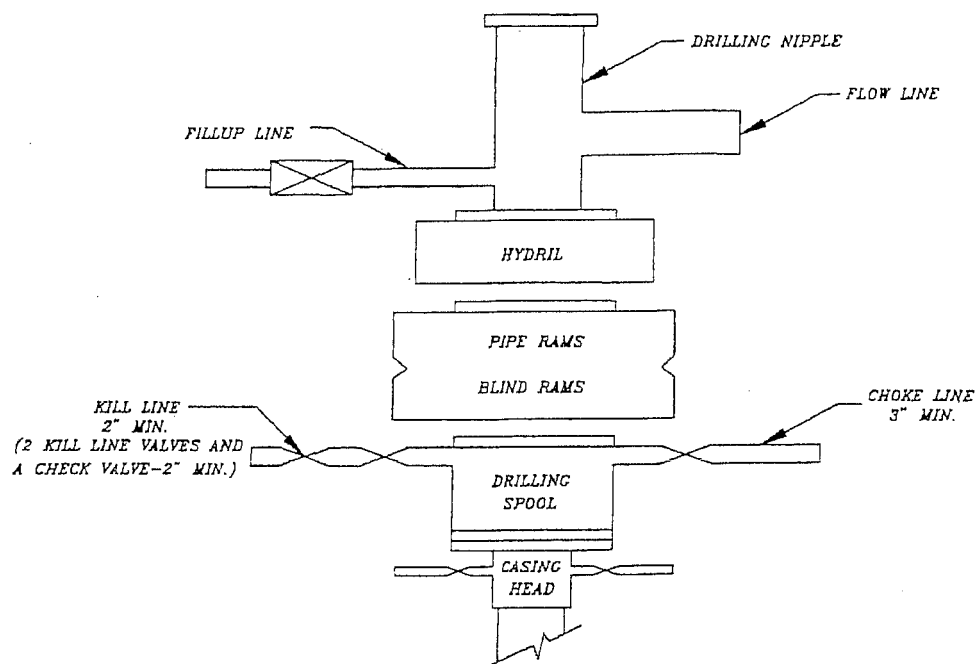

**FEDERAL 1022-15L
NW/SW SEC. 15, T10S, R22E
UINTAH COUNTY, UTAH
UTU-01196-A**

ONSHORE ORDER NO. 1

MULTI-POINT SURFACE USE & OPERATIONS PLAN

1. Existing Roads:

Directions to the proposed location are attached.

Refer to Topo Maps A and B for location of access roads within a 2-mile radius.

All existing roads will be maintained and kept in good repair during all drilling and completion operations associated with this well.

2. Planned Access Roads:

A 30' of rights-of-way is required. Approximately 0.6 +/- miles of proposed access road. The proposed access road from the proposed Federal 1022-15M location, (Lease #UTU-01198-D) to cross into Sec. 22, T10S, R22E (Lease #UTU-01198-B), the access road will run into the lease line in Sec. 21, T10S, R22E (Lease #UTU-01198-B) then travel to through Sec. 15, T10S, R22E (Lease #UTU-01198-D) to the proposed location. Please refer to the attached Topo Map B.

The access road will be crowned (2 to 3%), ditched and constructed with a running surface of 18 feet and a maximum disturbed width of 30 feet. Graveling or capping the roadbed will be performed as necessary to provide a well constructed, safe road. Prior to construction or upgrading, the proposed road shall be cleared of any snow and allowed to dry completely.

Surface disturbance and vehicular traffic will be limited to the proposed location and proposed access route. Any additional area needed will be approved in advance. All construction shall be in conformance with the standards outlined in the BLM and Forest Service publication: Surface Operating Standards for Oil and Gas Exploration and Development. 1989.

The road surface and shoulders will be kept in a safe and usable condition and will be maintained in accordance with the original construction standards. All drainage ditches will be kept clear and free-flowing and will be maintained according to original construction standards. The access road surface will be kept free of trash during operations. All traffic will be confined to the approved disturbed surface. Road drainage crossings shall be designed so they will not cause siltation or accumulation of debris in the drainage crossing or shall the drainages be blocked by the road bed. Erosion of drainage ditches by runoff water shall be prevented by diverting water off at frequent intervals by means of cutouts. Should mud holes develop, they shall be filled in and detours around them avoided. When snow is removed from the road during the winter months, the snow shall be pushed outside of the borrow ditches, and the turnouts kept clear so that snowmelt will be channeled away from the road.

3. **Location of Existing Wells Within a 1-Mile Radius:**

Please refer to Topo Map C.

4. **Location of Existing & Proposed Facilities & Pipelines:**

The following guidelines will apply if the well is productive.

All production facilities will be located on the disturbed portion of the well pad and at a minimum of 25 feet from the toe of the back slope or the top of the fill slope.

A dike will be constructed completely around those production facilities which contain fluids (i.e., production tanks, produced water tanks, and/or heater/treater). These dikes will be constructed of compacted subsoil, be impervious, hold 100% of the capacity of the largest tank, and be independent of the back cut.

All permanent (on-site six months or longer) above the ground structures constructed or installed, including pumping units, will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the five state Rocky Mountain Inter-Agency Committee.

All facilities will be painted within six months of installation. Facilities required to comply with the Occupational Safety and Health Act (OSHA) will be excluded. The requested color is Carlsbad Canyon (2.5 Y 6/2) as determined during the on-site inspection.

Any necessary pits will be properly fenced to protect livestock and prevent wildlife entry.

Variances to Best Management Practices (BMP) Requests:

A 30' of rights-of-way is required. Approximately 3208' +/- of 4" proposed pipeline The proposed pipeline from the proposed Federal 1022-15M location, (Lease #UTU-01198-D) to cross into Sec. 22, T10S, R22E (Lease #UTU-01198-B), the pipeline will run into the lease line in Sec. 21, T10S, R22E (Lease #UTU-01198-B) then travel to through Sec. 15, T10S, R22E (Lease #UTU-01198-D) to the proposed location. Please refer to the attached Topo Map D for pipeline placement.

The pipeline will be butt-welded together. The pipeline shall be installed on surface within access corridor for the well location. As a Best Management Practice (BMP), the pipeline would be buried within the access road corridor if possible. The construction of pipelines requires the corridor of 30 feet.

This exception to the BMP should be granted by the BLM Authorized Officer because indurated bedrock, such as sandstone, is at or within 2 feet of the surface and the soil has a poor history for successful rehabilitation.

5. **Location and Type of Water Supply:**

Water for drilling purposes will be obtained from Dalbo Inc.'s underground well located in Ouray, Utah, Sec.32, T4S,R3E, Water User Claim #43-8496, Application #53617.

Water will be hauled to location over the roads marked on Maps A and B.

No water well is to be drilled on this lease.

6. **Source of Construction Materials:**

Surface and subsoil materials in the immediate area will be utilized.

Any gravel will be obtained from a commercial source.

7. **Methods of Handling Waste Materials:**

Drill cuttings will be contained and buried in the reserve pit.

Drilling fluids, including salts and chemicals, will be contained in the reserve pit. Upon termination of drilling and completion operations, the liquid contents of the reserve pit will be removed and disposed of at an approved waste disposal facility within 120 days after drilling is terminated.

The reserve pit will be constructed on the location and will not be located within natural drainage, where a flood hazard exists or surface runoff will destroy or damage the pit walls. The reserve pit will be constructed so that it will not leak, break, or allow discharge of liquids.

A plastic reinforced liner is to be used as discussed during on-site inspection. It will be a minimum of 20 mil thick and felt with sufficient bedding used to cover any rocks. The liner will overlap the pit walls and be covered with dirt and/or rocks to hold it in place. No trash or scrap that could puncture the liner will be disposed of in the pit.

Any spills of oil, gas, salt water, or other noxious fluids will be immediately cleaned up and removed to an approved disposal site.

A chemical porta-toilet will be furnished with the drilling rig.

Garbage, trash, and other waste materials will be collected in a portable, self-contained, fully enclosed trash cage during operations. No trash will be burned on location.

All debris and other waste material not contained in the trash cage will be cleaned up and removed from the location immediately after removal of the drilling rig.

Any open pits will be fenced during the operations. The fencing will be maintained until such time as the pits are backfilled.

No chemicals subject to reporting under SARA Title III (hazardous materials) in an amount greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

Any produced water from the proposed well will be contained in a water tank and will then be hauled by truck to one of the pre-approved disposal sites: RNI, Sec. 5, T9S, R22E, NBU #159, Sec.35, T9S,

R21E, Ace Oilfield, Sec. 2, T6S, R20E, MC&MC, Sec. 12, T6S, R19E. (Request is in lieu of filing Form 3160-5, after initial production).

8. **Ancillary Facilities:**

None are anticipated.

9. **Well Site Layout:** (See Location Layout Diagram)

The attached Location Layout Diagram describes drill pad cross-sections, cuts and fills, and locations of the mud tanks, reserve pit, flare pit, pipe racks, trailer parking, spoil dirt stockpile(s), and surface material stockpile(s).

Please see the attached diagram to describe rig orientation, parking areas, and access roads.

39 inch net wire will be used with at least one strand of barbed wire on top of the net wire. Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.

The net wire shall be no more than two inches above the ground. The barbed wire shall be three inches over the net wire. Total height of the fence shall be at least 42 inches.

Corner posts shall be cemented and/or braced in such a manner to keep the fence tight at all times.

Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distance between any 2 fence posts shall be no greater than 16 feet.

All wire shall be stretched, by using a stretching device, before it is attached to corner posts.

The reserve pit fencing will be on three sides during drilling operations, and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

10. **Plans for Reclamation of the Surface:**

Producing Location:

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, materials, trash, and debris not required for production.

Immediately upon well completion, any hydrocarbons in the pit shall be removed in accordance with 43 CFR 3162.7-1.

Before any dirt work associated with location restoration takes place, the reserve pit shall be as dry as possible. All debris in it will be removed. Other waste and spoil materials will be disposed of immediately upon completion of operations.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The reserve pit will be reclaimed within 90 days from the date of well completion, weather permitting.

To prevent surface water (s) from standing (ponding) on the reclaimed reserve pit area, final reclamation of the reserve pit will consist of "mounding" the surface three feet above surrounding ground surface to allow the reclaimed pit area to drain effectively.

Upon completion of backfilling, leveling, and recontouring, the stockpiled topsoil will be spread evenly over the reclaimed area(s).

Dry Hole/Abandoned Location:

Abandoned well sites, roads, and other disturbed areas will be restored as near as practical to their original condition. Where applicable, these conditions include the re-establishment of irrigation systems, the re-establishment of appropriate soil conditions, and re-establishment of vegetation as specified.

All disturbed surfaces will be recontoured to the approximate natural contours, with reclamation of the well pad and access road to be performed as soon as practical after final abandonment. Reseeding operations will be performed after completion of other reclamation operations.

When the pit is backfilled, the topsoil pile shall be spread on the location up to the rig anchor points. The location will be reshaped to the original contour to the extent possible. The following seed mixture will be used to reclaim the surface for interim reclamation using appropriate reclamation methods. A total of 12 lbs/acre will be used if the seeds are drilled (24 lbs/acre if the seeds are broadcast). The per acre requirements for drilled seeds are:

Galleta Grass	20 lbs.
---------------	---------

The operator shall call BLM for the seed mixture when final reclamation occurs.

11. Surface Ownership:

United States of America
Bureau of Land Management
170 South 500 East
Vernal, UT 84078
(435) 781-4400

12. Other Information:

A Class III Archaeological Survey has been performed and completed on June 15, 2006, the Archaeological Report No. 06-245.

The Paleontological Reconnaissance Survey has been performed and completed on August 22, 2006 the Paleontological Reconnaissance Survey Report No. 06-192. These reports are being submitted along with the Application for Permit to Drill (APD).

WILDLIFE STIPUALTIONS:

ANTELOPE: No construction or drilling May 15th – June 20th.

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, the approved Plan of Operations, and any applicable Notice of Lessees. The Operator is fully responsible for the actions of his subcontractors. A copy of these conditions will be furnished to the field representative to ensure compliance. The Operator will control noxious weeds along Rights-Of-Way for roads, pipelines, well sites, or other applicable facilities.

13. **Lessee's or Operators's Representative & Certification:**

Sheila Upchego
Regulatory Analyst
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435) 781-7024

Randy Bayne
Drilling Manager
Kerr-McGee Oil & Gas Onshore LP
1368 South 1200 East
Vernal, UT 84078
(435)781-7018

Certification: All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice to Lessees.

The Operator will be fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Kerr-McGee Oil & Gas Onshore LP is considered to be the operator of the subject well. Westport Oil & Gas Company agrees to be responsible under the terms and the conditions of the lease for the operations conducted upon leased lands.

Bond coverage pursuant to 43 CFR 3104 for the lease activities is being provided by BLM Nationwide Bond #WY-2357.

I hereby certify that the proposed drill site and access route has been inspected and that I am familiar with the conditions that currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and the work associated with the operations proposed herein will be performed by the Operator, its contractors, and subcontractors in conformity with this plan and the terms and conditions under which it is approved.


Sheila Upchego

December 4, 2006
Date

Kerr-McGee Oil & Gas Onshore LP
FEDERAL #1022-15L
SECTION 15, T10S, R22E, S.L.B.&M.

PROCEED IN A WESTERLY DIRECTION FROM VERNAL, UTAH ALONG U.S. HIGHWAY 40 APPROXIMATELY 14.0 MILES TO THE JUNCTION OF STATE HIGHWAY 88; EXIT LEFT AND PROCEED IN A SOUTHERLY DIRECTION APPROXIMATELY 17.0 MILES TO OURAY, UTAH; PROCEED IN A SOUTHERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 11.2 MILES ON THE SEEP RIDGE ROAD TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN LEFT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 10.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE NORTHEAST; TURN LEFT AND PROCEED IN A NORTHEASTERLY DIRECTION APPROXIMATELY 1.7 MILES TO THE JUNCTION OF THIS ROAD AND AN EXISTING ROAD TO THE EAST; TURN RIGHT AND PROCEED IN AN EASTERLY, THEN SOUTHEASTERLY DIRECTION APPROXIMATELY 0.8 MILES TO THE BEGINNING OF THE ROAD RE-ROUTE TO THE NORTHEAST; FOLLOW ROAD FLAGS IN A NORTHEASTERLY DIRECTION APPROXIMATELY 0.1 MILES TO AN EXISTING ROAD TO THE EAST; PROCEED IN AN EASTERLY DIRECTION APPROXIMATELY 150' TO THE BEGINNING OF THE PROPOSED ACCESS FOR THE #1022-15M TO THE NORTH; FOLLOW ROAD FLAGS IN A NORTHERLY DIRECTION APPROXIMATELY 0.2 MILES TO THE BEGINNING OF THE PROPOSED ACCESS TO THE SOUTHWEST; FOLLOW ROAD FLAGS IN A SOUTHWESTERLY, THEN NORTHERLY DIRECTION APPROXIMATELY 0.6 MILES TO THE PROPOSED LOCATION.

TOTAL DISTANCE FROM VERNAL, UTAH TO THE PROPOSED WELL LOCATION IS APPROXIMATELY 56.3 MILES.

Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-15L
LOCATED IN UINTAH COUNTY, UTAH
SECTION 15, T10S, R22E, S.L.B.&M.

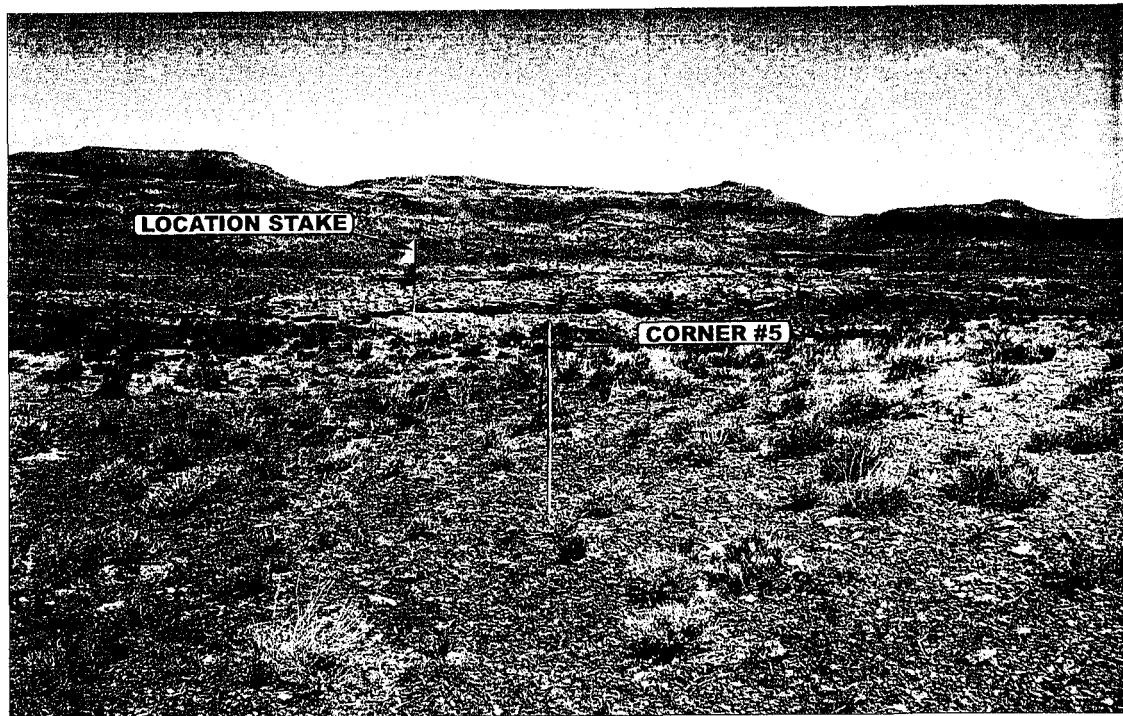


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY

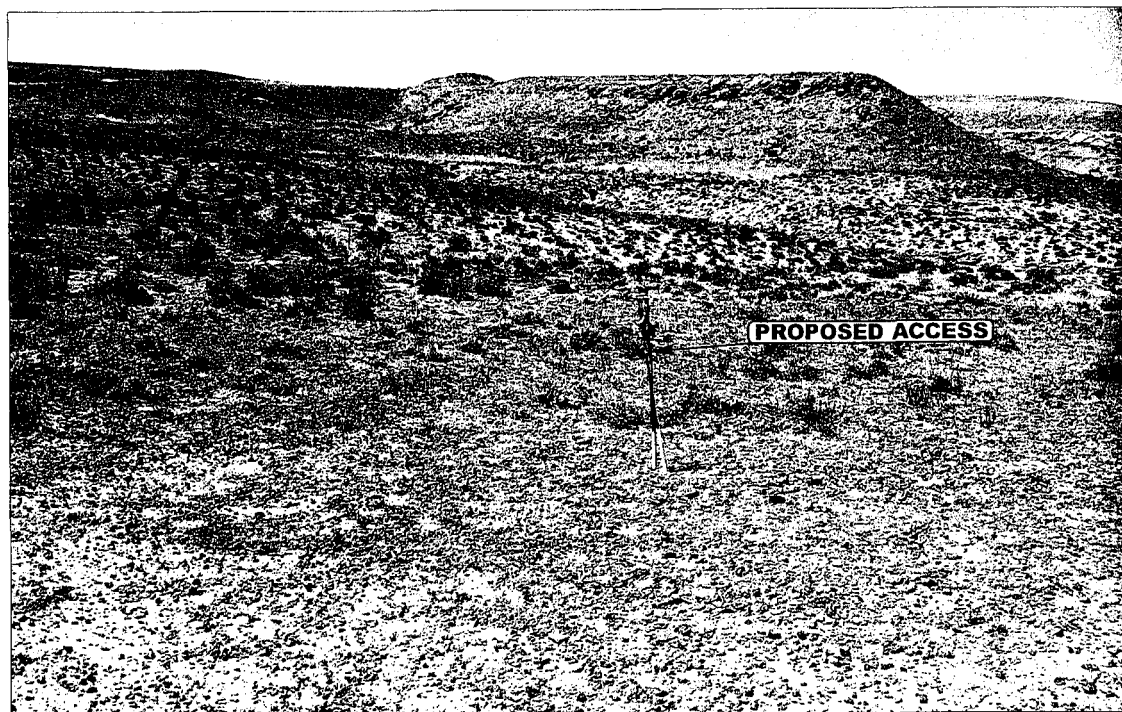


PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY



- Since 1964 -

ELS

Uintah Engineering & Land Surveying

85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

LOCATION PHOTOS


05 19 06
MONTH DAY YEAR

PHOTO

TAKEN BY: J.R.

DRAWN BY: C.P.

REVISED: 00-00-00

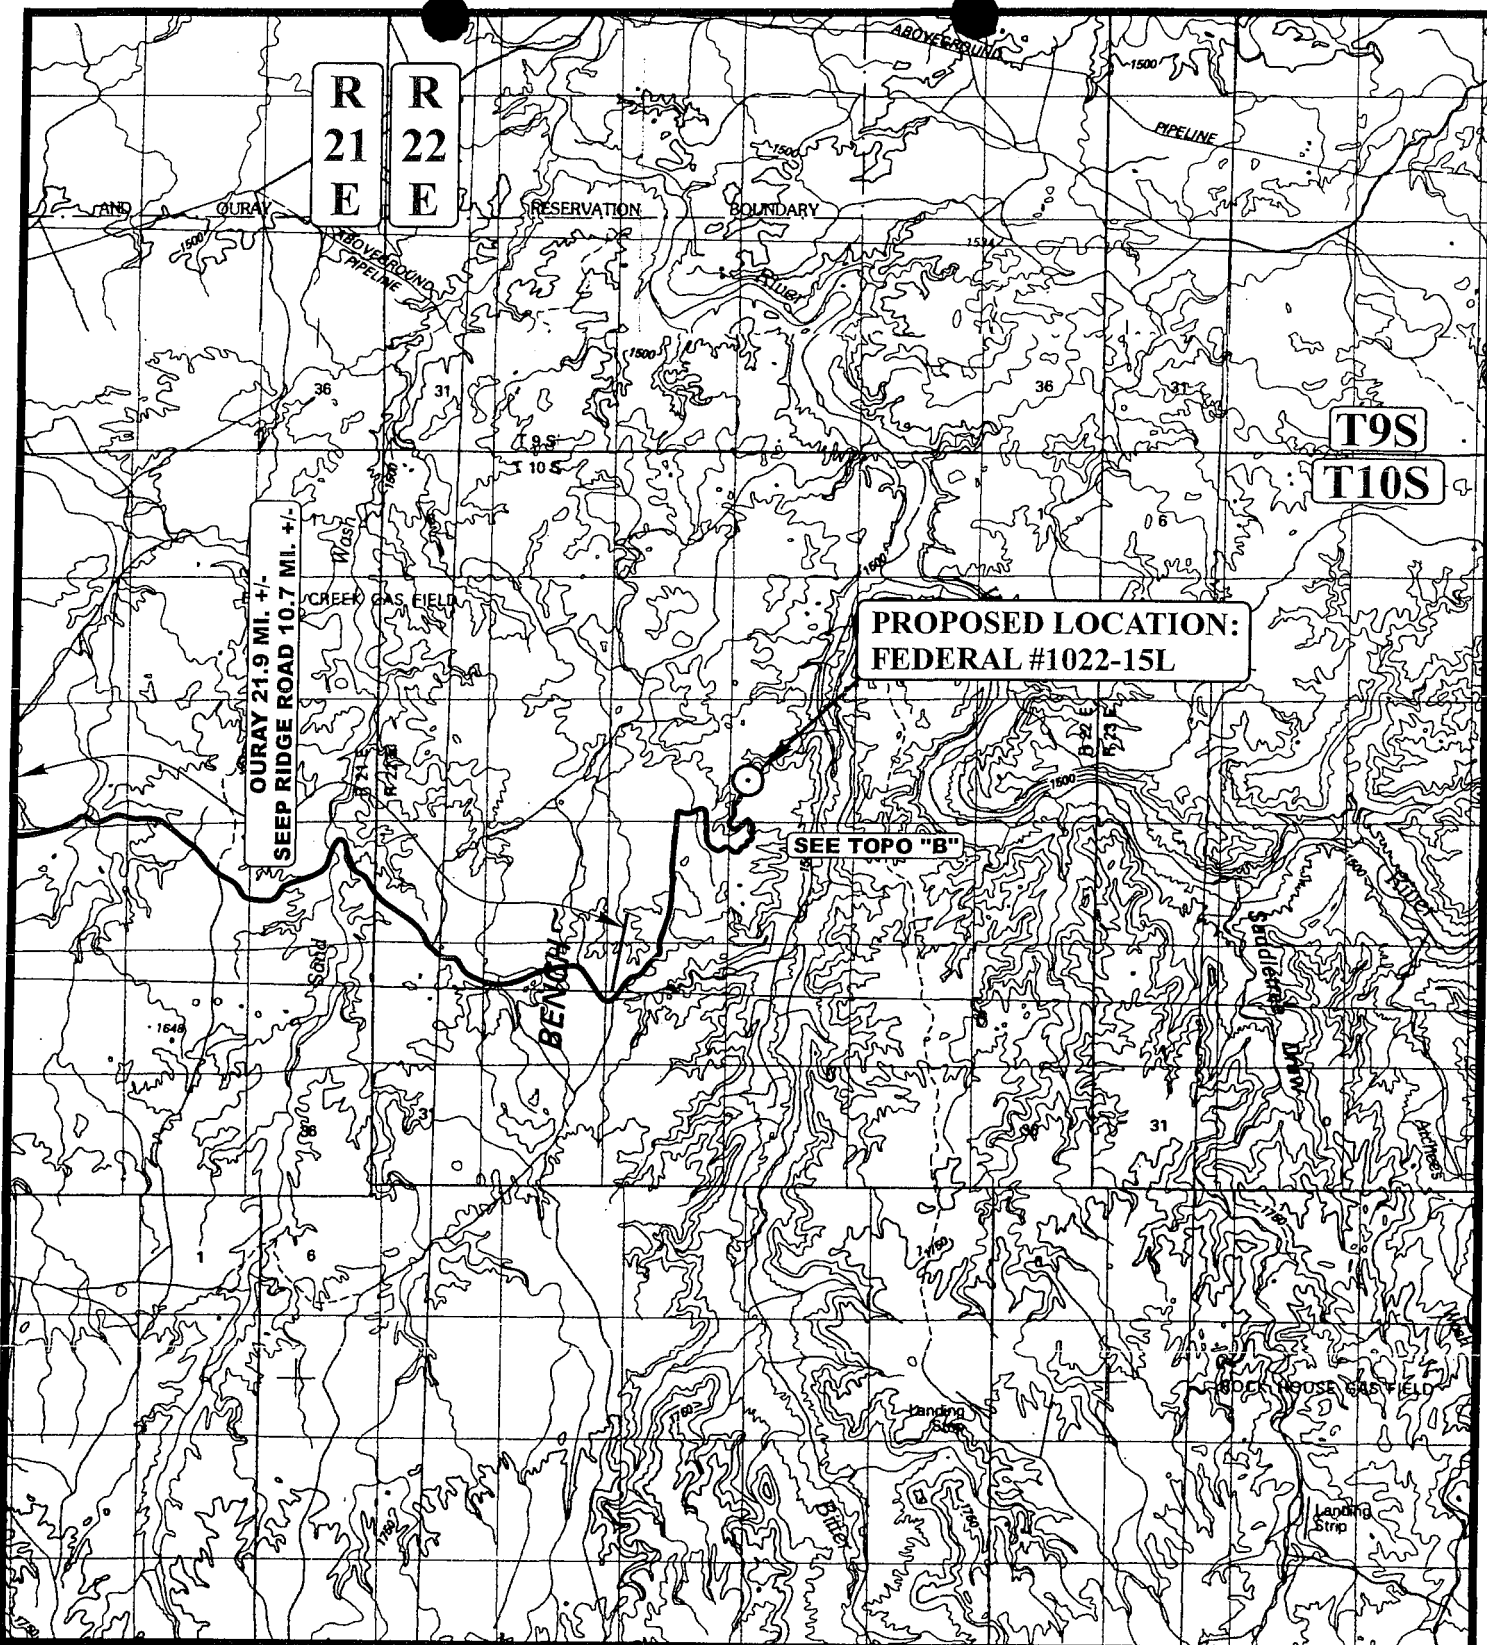

LEGEND:

○ PROPOSED LOCATION

N

Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-15L

SECTION 15, T10S, R22E, S.L.B.&M.

1837' FSL 776' FWL



Utah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

**TOPOGRAPHIC
MAP**


05 19 06
MONTH DAY YEAR

SCALE: 1:100,000

DRAWN BY: C.P.

REVISED: 00-00-00

**A
TOPO**

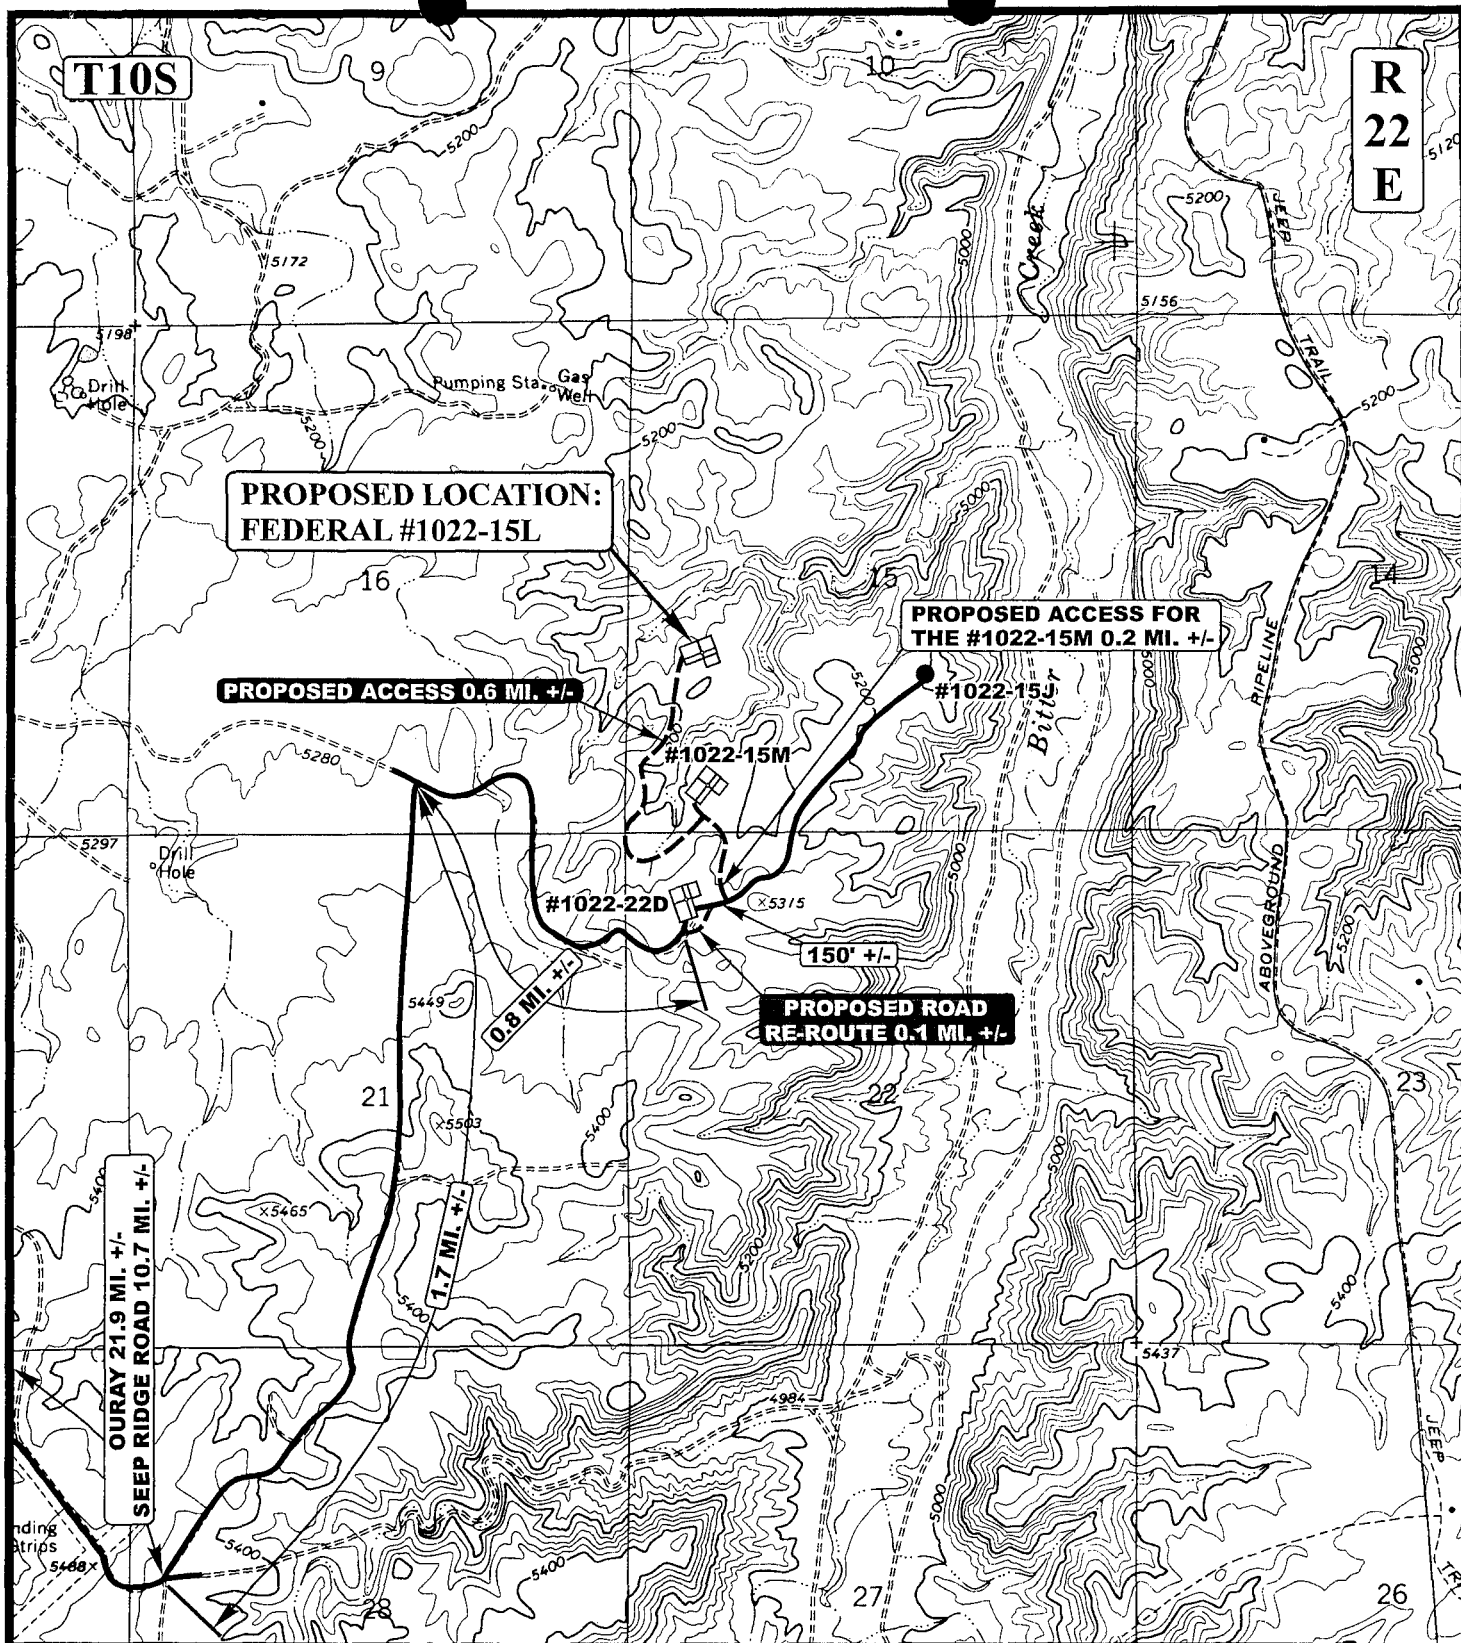

LEGEND:

- EXISTING ROAD
- PROPOSED ACCESS ROAD
- PROPOSED ROAD RE-ROUTE

Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-15L
SECTION 15, T10S, R22E, S.L.B.&M.
1837' FSL 776' FWL




Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813



TOPOGRAPHIC MAP
05 19 06
MONTH DAY YEAR
SCALE: 1" = 2000' DRAWN BY: C.P. REVISED: 00-00-00



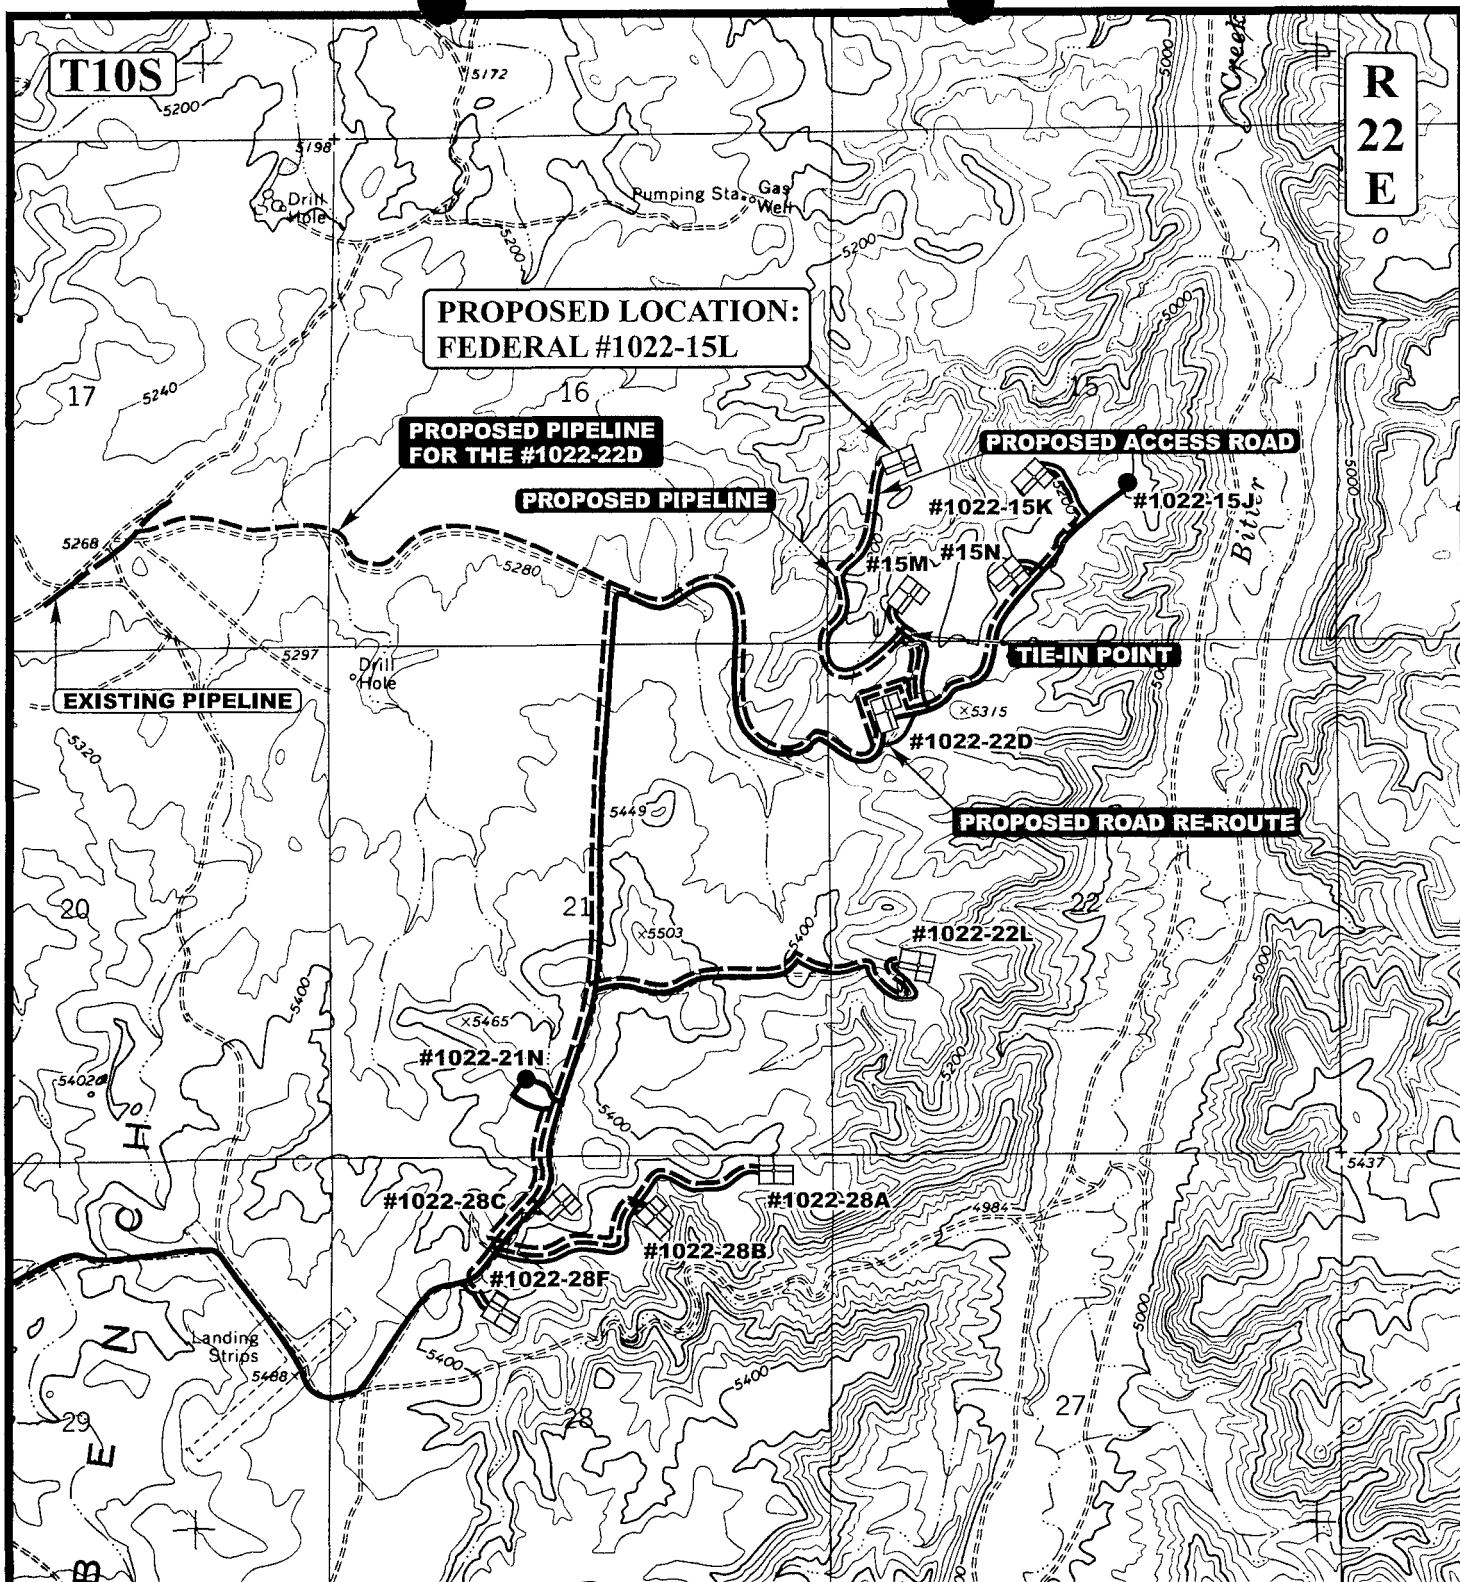

APPROXIMATE TOTAL PIPELINE DISTANCE = 3,208' +/-

LEGEND:

- ===== PROPOSED ROAD RE-ROUTE
- EXISTING PIPELINE
- PROPOSED ACCESS ROAD
- PROPOSED PIPELINE
- PROPOSED PIPELINE (SERVICING OTHER WELLS)



Kerr-McGee Oil & Gas Onshore LP

FEDERAL #1022-15L

SECTION 15, T10S, R22E, S.L.B.&M.

1837' FSL 776' FWL



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813

TOPOGRAPHIC
MAP

05 19 06
MONTH DAY YEAR

SCALE: 1" = 2000'

DRAWN BY: C.P.

REVISED: 00-00-00



Kerr-McGee Oil & Gas Onshore LP
FEDERAL #1022-15L
PIPELINE ALIGNMENT
LOCATED IN UINTAH COUNTY, UTAH
SECTION 15, T10S, R22E, S.L.B.&M.

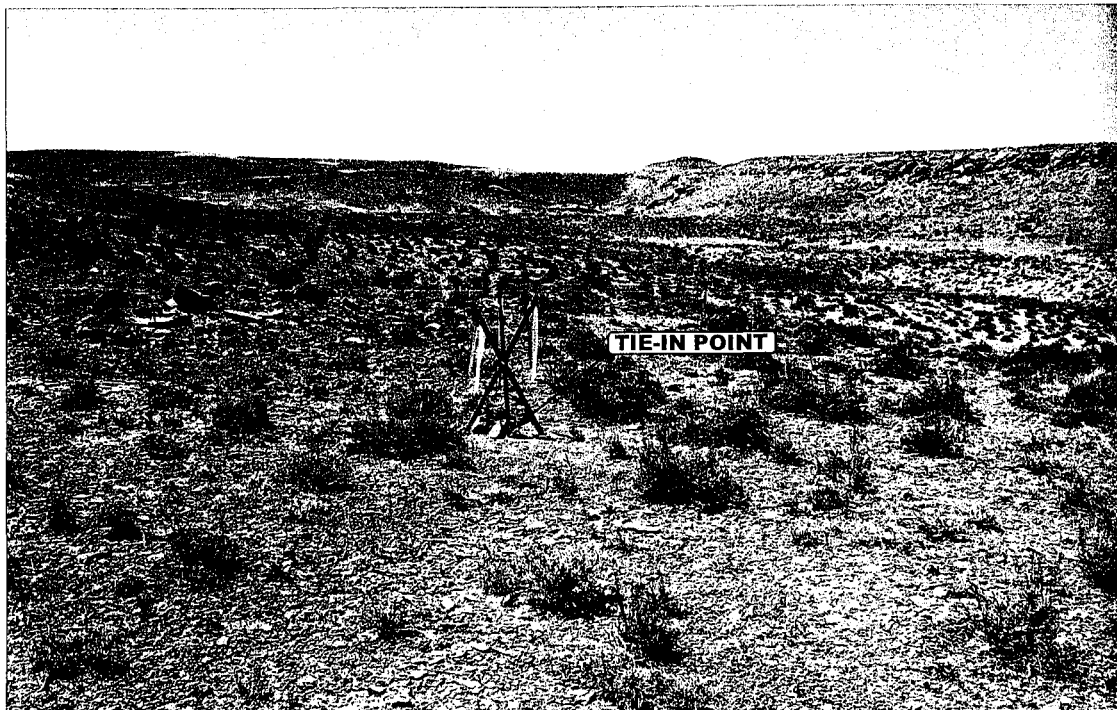


PHOTO: VIEW FROM TIE-IN POINT

CAMERA ANGLE: SOUTHWESTERLY

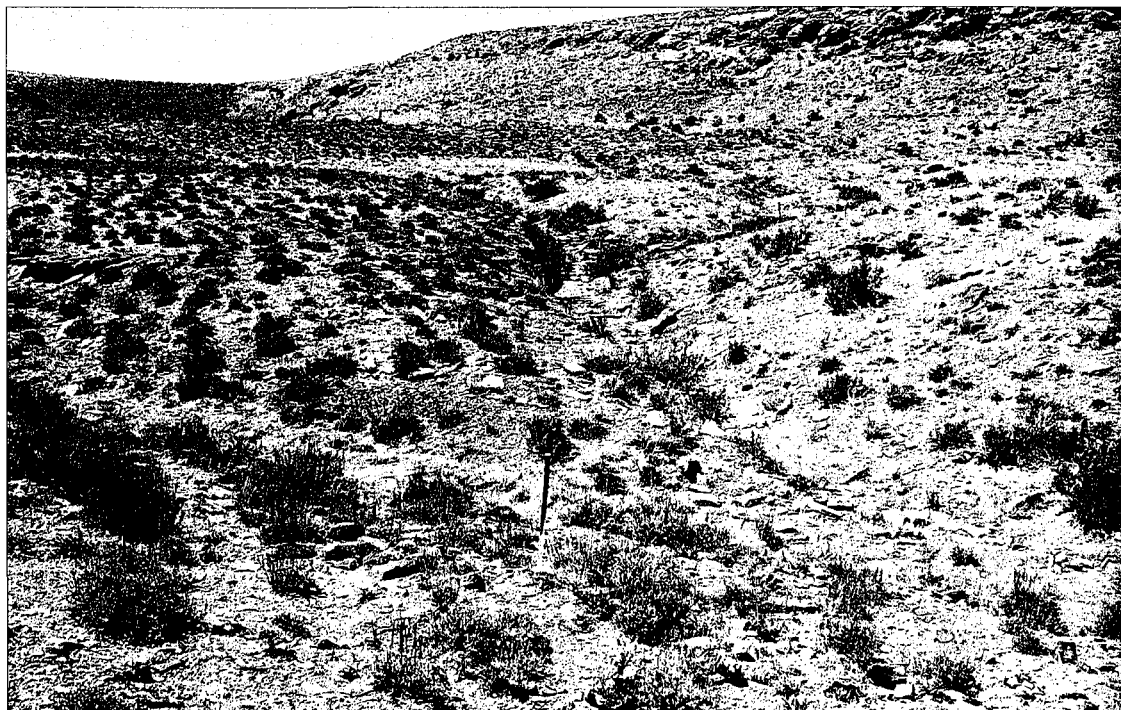


PHOTO: VIEW OF PIPELINE ALIGNMENT

CAMERA ANGLE: SOUTHWESTERLY



- Since 1964 -

UELS Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsinc.com

PIPELINE PHOTOS

05 19 06
MONTH DAY YEAR

PHOTO

TAKEN BY: J.R.

DRAWN BY: C.P.

REVISED: 00-00-00

Herr-McGee Oil & Gas Onshore LP

FIGURE #1


LOCATION LAYOUT FOR

FEDERAL #1022-15L
SECTION 15, T10S, R22E, S.L.B.&M.

F-4.2' 1837' FSL 776 FWL
El. 182.0' Proposed Access Road

Approx.
Toe of
Fill Slope


F-10.2'
El. 176.0'



SCALE: 1" = 50'
DATE: 05-23-06
Drawn By: C.H.

NOTE:

Flare Pit is to be located
a min. of 100' from the
Well Head.

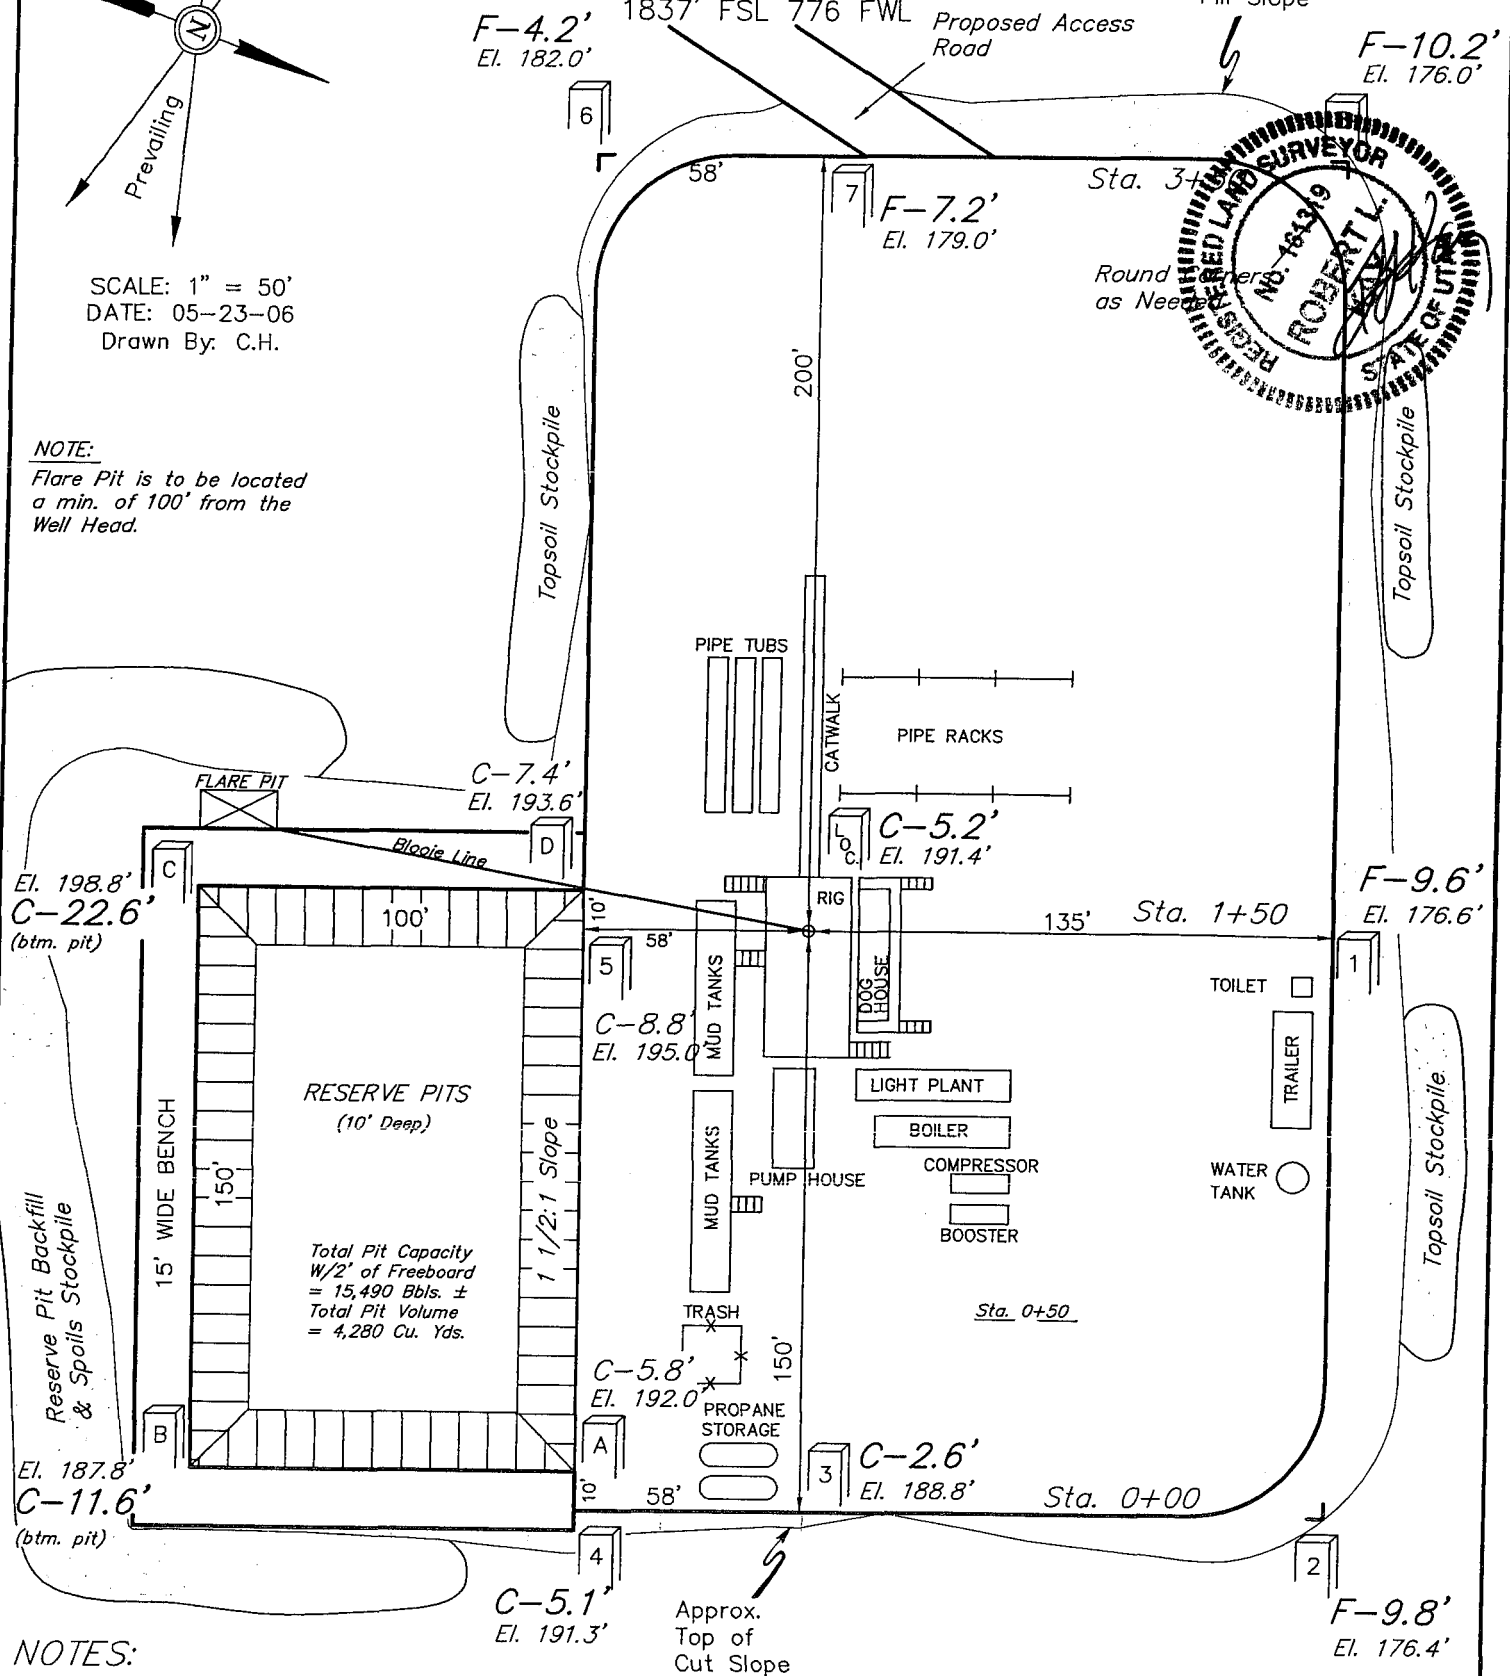

NOTES:

Elev. Ungraded Ground At Loc. Stake = 5191.4'
FINISHED GRADE ELEV. AT LOC. STAKE = 5186.2'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

Kerr-McGee Oil & Gas Onshore LP

FIGURE #2

TYPICAL CROSS SECTIONS FOR

FEDERAL #1022-15L


SECTION 15, T10S, R22E, S.L.B.&M.

1837' FSL 776 FWL



1" = 20'
X-Section
Scale
1" = 50'

DATE: 05-23-06
Drawn By: C.H.

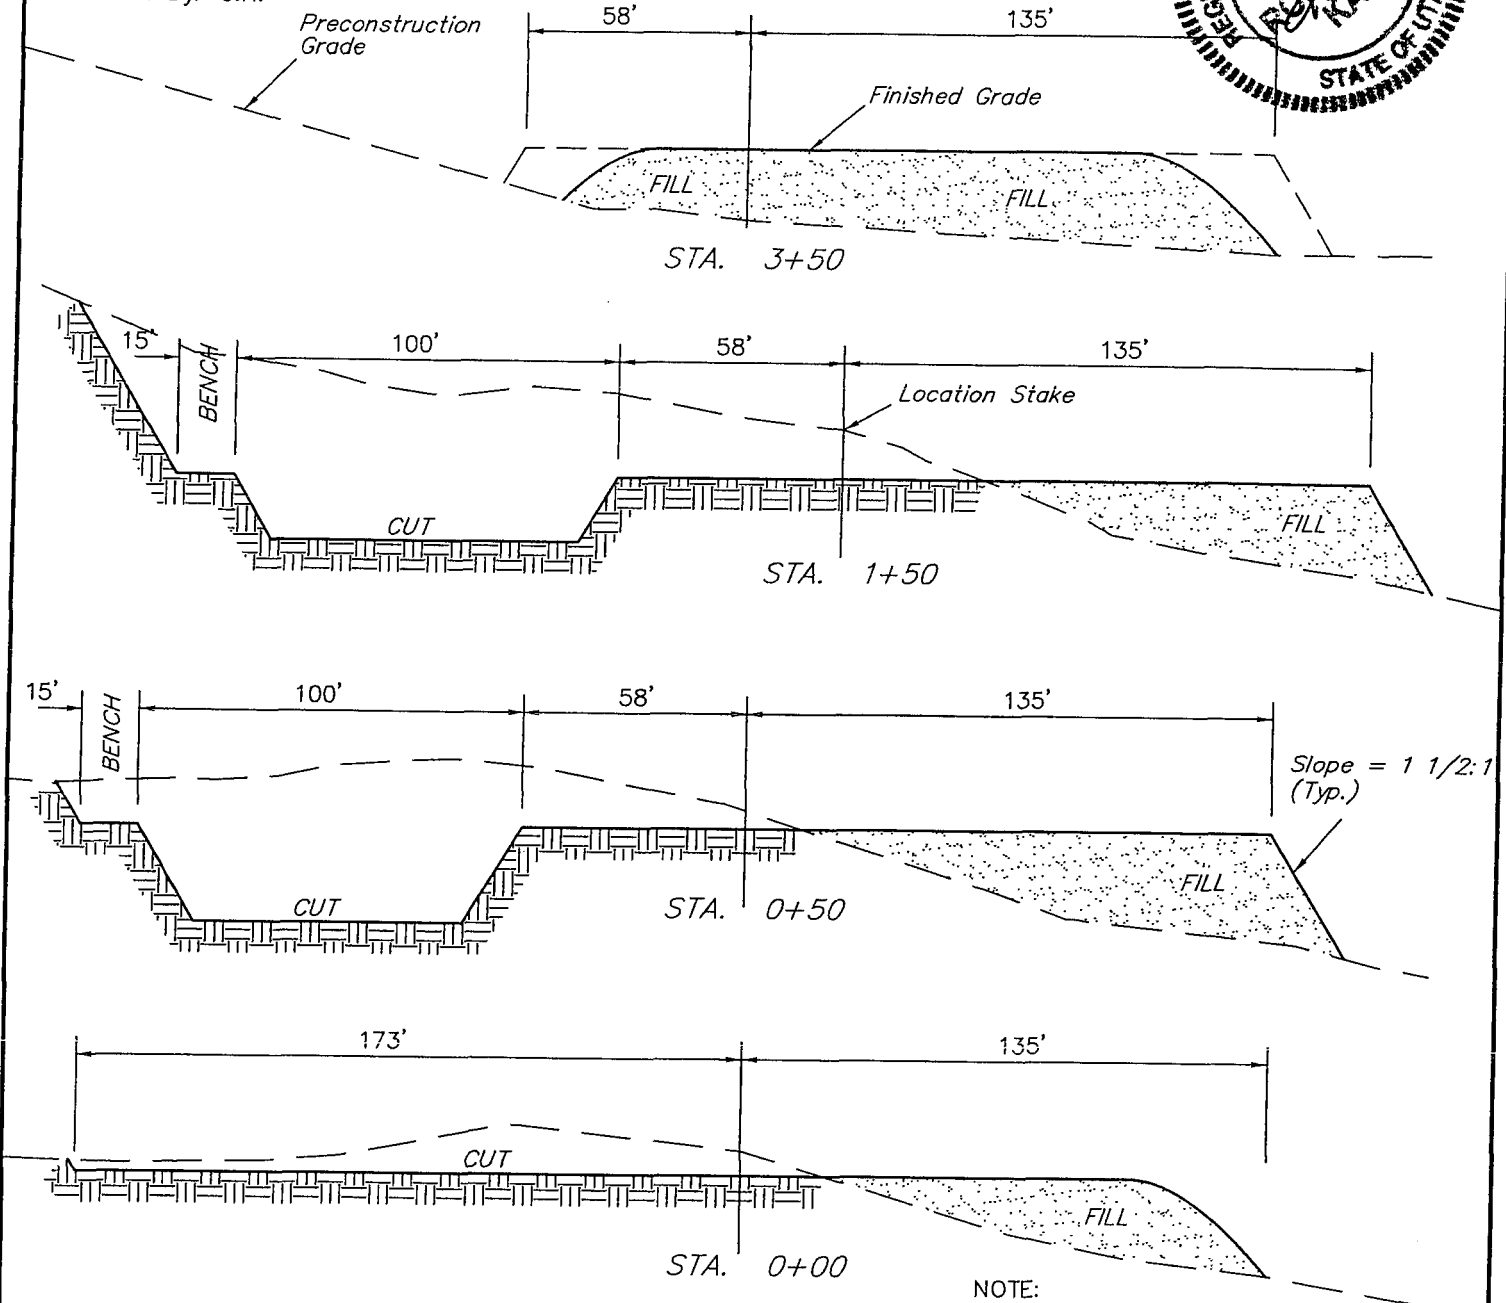

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

APPROXIMATE YARDAGES

CUT	
(6") Topsoil Stripping	= 1,970 Cu. Yds.
Remaining Location	= 13,570 Cu. Yds.
TOTAL CUT	= 15,540 CU.YDS.
FILL	= 11,430 CU.YDS.

NOTE:

Topsoil should not be
Stripped Below Finished
Grade on Substructure Area.

EXCESS MATERIAL	= 4,110 Cu. Yds.
Topsoil & Pit Backfill (1/2 Pit Vol.)	= 4110 Cu. Yds.
EXCESS UNBALANCE	= 0 Cu. Yds.
(After Interim Rehabilitation)	

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East * Vernal, Utah 84078 * (435) 789-1017

WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 12/11/2006

API NO. ASSIGNED: 43-047-38924

WELL NAME: FEDERAL 1022-15L

OPERATOR: KERR-MCGEE OIL & GAS (N2995)

PHONE NUMBER: 435-781-7024

CONTACT: SHEILA UPCHEGO

PROPOSED LOCATION:

NWSW 15 100S 220E

SURFACE: 1837 FSL 0776 FWL

BOTTOM: 1837 FSL 0776 FWL

COUNTY: UINTAH

LATITUDE: 39.94667 LONGITUDE: -109.4319

UTM SURF EASTINGS: 633966 NORTHINGS: 4422806

FIELD NAME: NATURAL BUTTES (630)

INSPECT LOCATN BY: / /

Tech Review

Initials

Date

Engineering

Geology

Surface

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-01196-A

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: WSMVD

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat

☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. WY-2357)

☒ Potash (Y/N)

☒ Oil Shale 190-5 (B) or 190-3 or 190-13

☒ Water Permit
(No. 43-8496)

☒ RDCC Review (Y/N)
(Date:)

☒ Fee Surf Agreement (Y/N)

☒ Intent to Commingle (Y/N)

LOCATION AND SITING:

☐ R649-2-3.

Unit: _____

☐ R649-3-2. General

Siting: 460 From Qtr/Qtr & 920' Between Wells

☐ R649-3-3. Exception

☒ Drilling Unit

Board Cause No: 123-14

Eff Date: 12-2-1999


Siting: 460' fr u/bd of 8 uncomm. tracts

☐ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

1 - Federal Approval
2 - OIL SHALE

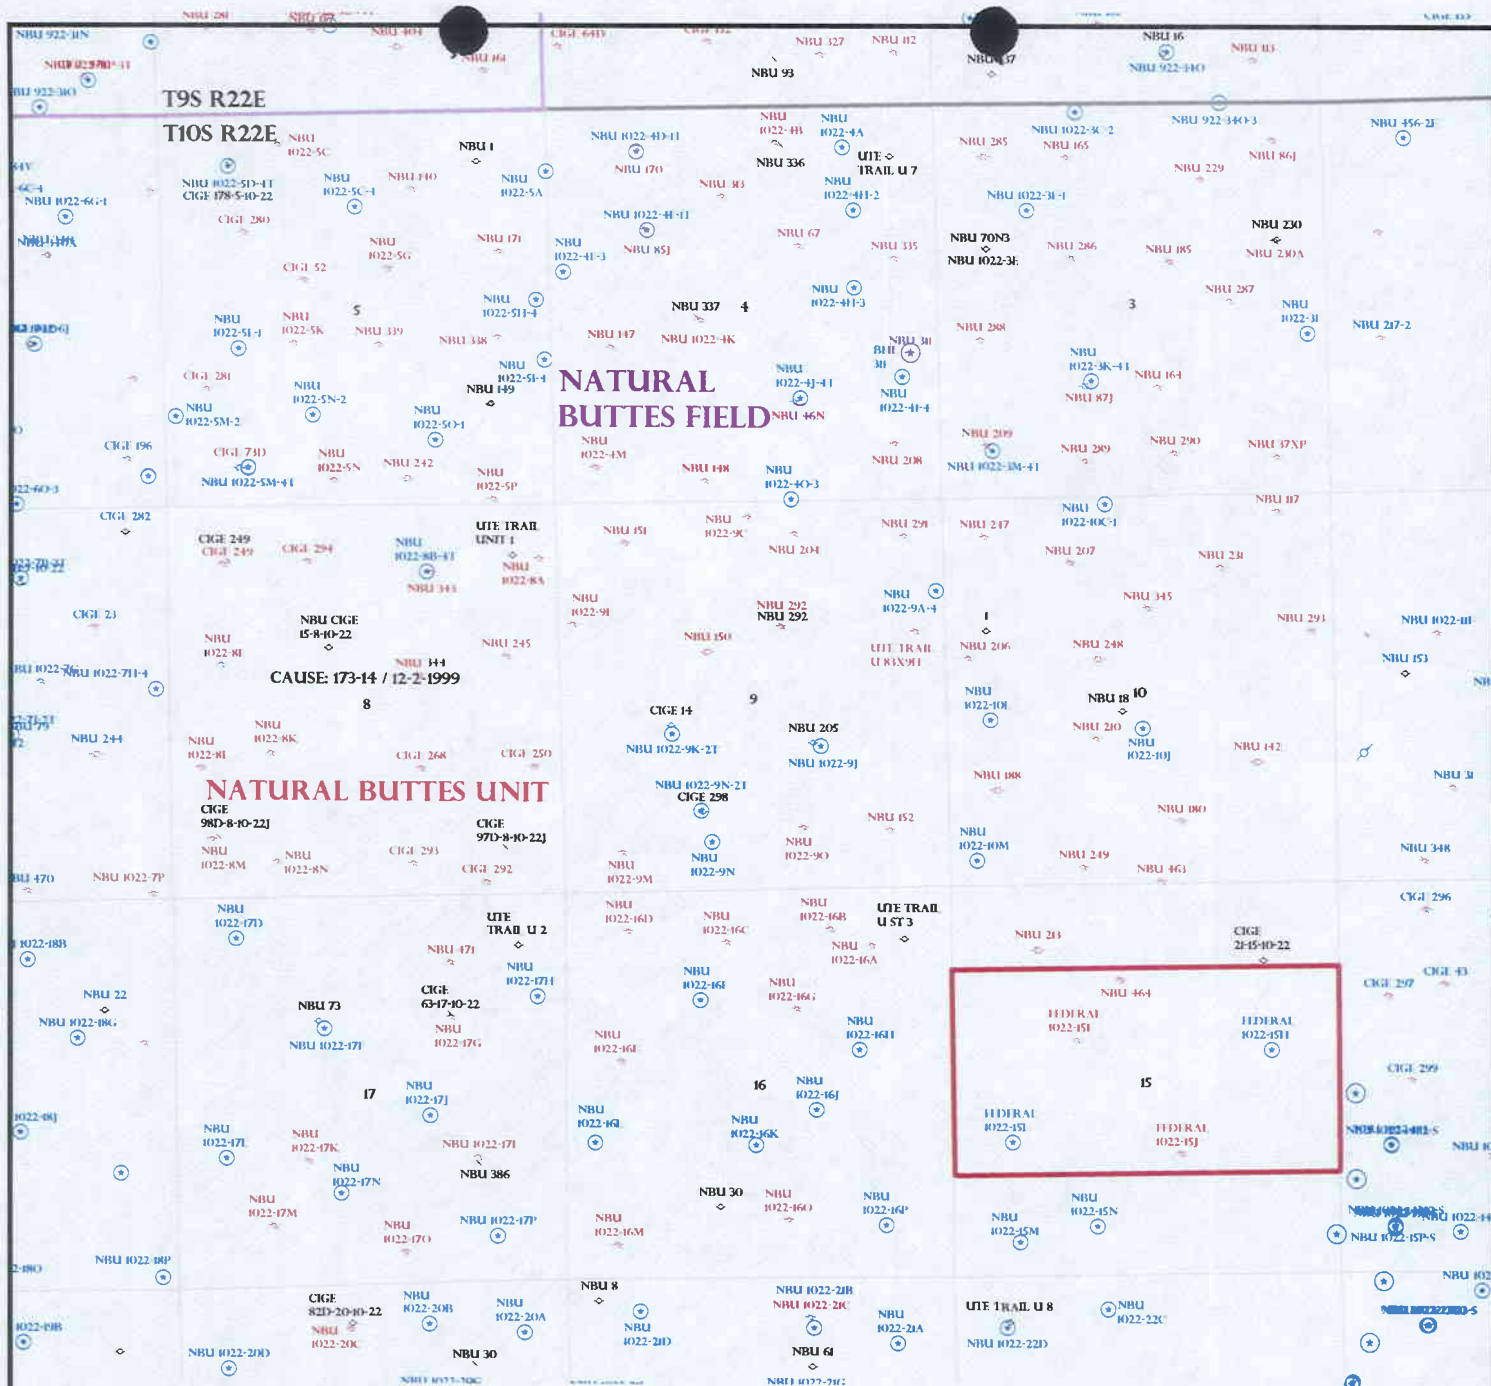

OPERATOR: KERR MCGEE O&G (N2995)

SEC: 3,4,8,9,15 T.10S R. 22E

FIELD: NATURAL BUTTES (630)

COUNTY: UINTAH

CAUSE: 173-14 / 12-2-1999

Field Status


- ABANDONED
- ACTIVE
- COMBINED
- INACTIVE
- PROPOSED
- STORAGE
- TERMINATED

Unit Status

- EXPLORATORY
- GAS STORAGE
- NF PP OIL
- NF SECONDARY
- PENDING
- PI OIL
- PP GAS
- PP GEOTHERML
- PP OIL
- SECONDARY
- TERMINATED

Wells Status

- + GAS INJECTION
- x GAS STORAGE
- x LOCATION ABANDONED
- o NEW LOCATION
- x PLUGGED & ABANDONED
- o PRODUCING GAS
- o PRODUCING OIL
- x SHUT-IN GAS
- x SHUT-IN OIL
- x TEMP. ABANDONED
- x TEST WELL
- o WATER INJECTION
- o WATER SUPPLY
- o WATER DISPOSAL
- o DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
DATE: 13-DECEMBER-2006



State of Utah

**Department of
Natural Resources**

MICHAEL R. STYLER
Executive Director

**Division of
Oil, Gas & Mining**

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

December 14, 2006

Kerr-McGee Oil & Gas Onshore LP
1368 S 1200 E
Vernal, UT 84078

Re: Federal 1022-15L Well, 1837' FSL, 776' FWL, NW SW, Sec. 15, T. 10 South,
R. 22 East, Uintah County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-047-38924.

Sincerely,

Gil Hunt
Associate Director

pab
Enclosures

cc: Uintah County Assessor (via e-mail)
Bureau of Land Management, Vernal District Office

Operator: Kerr-McGee Oil & Gas Onshore LP
Well Name & Number Federal 1022-15L
API Number: 43-047-38924
Lease: UTU-01196-A
Location: NW SW Sec. 15 T. 10 South R. 22 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division within 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dan Jarvis at (801) 538-5338

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. In accordance with Order in Cause No. 190-5(b) dated October 28, 1982, the Operator shall comply with requirements of Rules R649-3-31 and R649-3-27 pertaining to Designated Oil Shale Areas. Additionally, the operator shall ensure that the surface and/or production casing is properly cemented over the entire oil shale interval as defined by Rule R649-3-31. The Operator shall report the actual depth the oil shale is encountered to the Division.

5. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires November 30, 2000

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or reenter an abandoned well. Use Form 3160-3 (APD) for such proposals.

5. Lease Serial No.

UTU-01196-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

FEDERAL 1022-15L

9. API Well No.

43-047-38924

10. Field and Pool, or Exploratory Area

NATURAL BUTTES

11. County or Parish, State

UINTAH, UTAH

SUBMIT IN TRIPLICATE – Other instructions on reverse side

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

KERR-MCGEE OIL & GAS ONSHORE LP

3a. Address -

1999 BROADWAY, STE 3700, DENVER, CO 80202 Attention - Raleen White

3b. Phone No. (include area code)

720-929-6666

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1837' FSL, 776' FWL

NWSW, SECTION 15, T10S, R22E, SLB&M

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other APD EXTENSION
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	DOGM
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.

THE OPERATOR REQUESTS AUTHORIZATION FOR A ONE YEAR EXTENSION FOR THE SUBJECT WELL LOCATION. SO T THE DRILLING OPERATIONS MAY BE COMPLETED. THE ORIGINAL APD WAS APPROVED BY THE DIVISION OF OIL, GAS AND MINING ON DECEMBER 14, 2006.

Approved by the
Utah Division of
Oil, Gas and Mining

RECEIVED

DEC 14 2007

Date: 12-24-07

By: [Signature]

DIV. OF OIL, GAS & MINING

14. I hereby certify that the foregoing is true and correct

Name (Printed/Typed)

RALEEN WHITE

Title

SR. REGULATORY ANALYST

Signature

Date

December 14, 2007

THIS SPACE FOR FEDERAL OR STATE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RESET

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304738924
Well Name: FEDERAL 1022-15L
Location: NWSW SEC 15-T10S-R22E
Company Permit Issued to: KERR-MCGEE OIL & GAS ONSHORE LP
Date Original Permit Issued: 12/14/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

12/14/2007

Date

Title: SR. REGULATORY ANALYST

Representing: KERR-MCGEE OIL & GAS ONSHORE LP

RECEIVED

DEC 04 2006

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

BLM

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

5. Lease Serial No. UTU-01196-A
6. If Indian, Allottee or Tribe Name
7. If Unit or CA Agreement, Name and No.
8. Lease Name and Well No. FEDERAL 1022-15L
9. API Well No. 43 047 38924
10. Field and Pool, or Exploratory NATURAL BUTTES
11. Sec., T., R., M., or Blk. and Survey or Area SEC. 15, T10S, R22E
12. County or Parish UINTAH
13. State UTAH

1a. Type of Work: ☒ DRILL ☐ REENTER

b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other ☐ Single Zone ☒ Multiple Zone

2. Name of Operator
KERR MCGEE OIL & GAS ONSHORE LP

3A. Address
1368 SOUTH 1200 EAST VERNAL, UT 84078

3b. Phone No. (include area code)
(435) 781-7024

4. Location of Well (Report location clearly and in accordance with any State requirements. *)
At surface **NWSW 1837'FSL, 776'FWL**

At proposed prod. Zone

14. Distance in miles and direction from nearest town or post office*
36 MILES SOUTH OF OURAY, UTAH

15. Distance from proposed*
location to nearest
property or lease line, ft.
(Also to nearest drig. unit line, if any)

776'

16. No. of Acres in lease
320.00

17. Spacing Unit dedicated to this well
40.00

18. Distance from proposed location*
to nearest well, drilling, completed,
applied for, on this lease, ft.

**REFER TO
TOPO C**

19. Proposed Depth
8480'

20. BLM/BIA Bond No. on file
BOND NO. WY-2357 B 000 291

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
5191' UNGRADED GL


22. Approximate date work will start*

23. Estimated duration


24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office. | 6. Such other site specific information and/or plans as may be required by the authorized office. |

25. Signature 	Name (Printed/Typed) SHEILA UPCHEGO	Date 12/4/2006
---	---	--------------------------

SENIOR LAND ADMIN SPECIALIST

Approved by (Signature) 	Name (Printed/Typed) TERRY KUCELLA	Date NOV 25 2008
Title Assistant Field Manager Lands & Mineral Resources	Office VERNAL FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached

CONDITIONS OF APPROVAL ATTACHED

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on reverse)

UDOGM


NOTICE OF APPROVAL

RECEIVED

DEC 01 2008

DIV. OF OIL, GAS & MINING

06BM1785A NOS 5/21/06



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East

VERNAL, UT 84078

(435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Kerr-McGee Oil & Gas Onshore, LP Location: NWSW, Sec. 15, T10S, R22E
Well No: Federal 1022-15L Lease No: UTU-01196-A
API No: 43-047-38924 Agreement: N/A

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
Supervisory NRS:	Karl Wright	(435) 781-4484	(435) 828-7381
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	(435) 828-3544
NRS/Enviro Scientist:	James Hereford	(435) 781-3412	
NRS/Enviro Scientist:	Chuck Macdonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Dan Emmett	(435) 781-3414	
NRS/Enviro Scientist:	Paul Percival	(435) 781-4493	
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545
NRS/Enviro Scientist:	David Gordon	(435) 781-4424	

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

***SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)***

Surface COAs:

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Site Specific COAs:

- The topsoil from the reserve pit shall be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be re-contoured and the topsoil re-spread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be re-contoured to natural contours, topsoil re-spread where appropriate, and the entire location seeded with the recommended seed mix. Seeding shall take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.
- The lessee/operator is given notice that lands in the lease have been identified as containing pronghorn kidding (antelope) habitat. It is requested that the lessee/operator not initiate surface disturbing activities or drilling from May 15th through June 20th. A survey may be conducted by a qualified biologist or a BLM representative during this timing period to determine if pronghorn are in the area.

DOWNHOLE CONDITIONS OF APPROVAL (COAs)

SITE SPECIFIC DOWNHOLE COAs:

- Electronic/mechanical mud monitoring equipment shall be required, from surface casing shoe to TD, which shall include as a minimum: pit volume totalizer (PVT); stroke counter; and flow sensor.
- A formation integrity test shall be performed at the surface casing shoe.
- The top of the production casing cement shall extend a minimum of 200 feet above the surface casing shoe.
- A Cement Bond Log (CBL) shall be run in the production casing from the TD to the top of cement. A field copy of the CBL shall be submitted to the BLM Vernal Field Office for review.
- Operator shall notify any active gilsonite mining operation within 2 miles of the location 48 hours prior to any blasting during surface construction for this well and access road.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.

- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.
- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (1/41/4, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.

- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.
- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.

- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-01196A
2. NAME OF OPERATOR: Kerr-McGee Oil & Gas Onshore, LP		6. IF INDIAN, ALLOTTEE OR TRIBE NAME: N/A
3. ADDRESS OF OPERATOR: P.O. Box 173779 CITY Denver STATE CO ZIP 80217-3779		7. UNIT or CA AGREEMENT NAME: N/A
PHONE NUMBER: (720) 929-6226		8. WELL NAME and NUMBER: Federal 1022-15L
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1837' FSL & 776' FWL		9. API NUMBER: 4304738924
QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NWSW 15 10S 22E		10. FIELD AND POOL, OR WILDCAT: Natural Buttes Field
COUNTY: Uintah		STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD Extension</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

Kerr-McGee Oil & Gas Onshore, LP, respectfully requests a one year extension for this APD in order to complete drilling operations. The Utah Division of Oil, Gas, and Mining initially approved this APD on 12/14/2006.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 12-22-08
By: [Signature]

NAME (PLEASE PRINT) <u>Kevin McIntyre</u>	TITLE <u>Regulatory Analyst</u>
SIGNATURE <u>[Signature]</u>	DATE <u>12/16/2008</u>

(This space for State use only)

COPY SENT TO OPERATOR

Date: 12-30-2008

Initials: KS

(See Instructions on Reverse Side)

RECEIVED
DEC 17 2008
DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 4304738924
Well Name: Federal 1022-15L
Location: NSW 1837' FSL & 776' FWL, Sec. 15, T10S R22E
Company Permit Issued to: Kerr-McGee Oil & Gas Onshore, LP
Date Original Permit Issued: 12/14/2006

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☒

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

12/16/2008
Date

Title: Regulatory Analyst

Representing: Kerr-McGee Oil & Gas Onshore, LP

RECEIVED

DEC 17 2008

DIV. OF OIL, GAS & MINING



JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

February 24, 2009

Raleen White
Anadarko Petroleum Corp.
PO Box 173779
Denver, CO 80217-3779

43 047 38924
Federal 1022-15L
105 22E 15

Re: APDs Rescinded at the request of Anadarko Petroleum Corp.


Dear Ms. White:

Enclosed find the list of APDs that you requested to be rescinded to Anadarko Petroleum Corp. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective February 20, 2009.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject locations.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal
SITLA, Ed Bonner

43047395730000	FEDERAL 1021-23P	10S	21E	23	SESE
43047395770000	FEDERAL 1021-25I	10S	21E	25	NESE
43047395760000	FEDERAL 1021-25M	10S	21E	25	SWSW
43047397930000	Federal 1021-25N	10S	21E	25	SESW
43047395810000	FEDERAL 1021-34K	10S	21E	34	NESW
43047395520000	FEDERAL 1021-34M	10S	21E	34	SWSW
43047395560000	FEDERAL 1021-34P	10S	21E	34	SESE
43047389890000	FEDERAL 1021-35F	10S	21E	35	SENW
43047389760000	FEDERAL 1021-35G	10S	21E	35	SWNE
43047389380000	FEDERAL 1021-35H	10S	21E	35	SENE
43047389350000	FEDERAL 1021-35I	10S	21E	35	NESE
43047389330000	FEDERAL 1021-35P	10S	21E	35	SESE
43047389370000	FEDERAL 1021-35A	10S	21E	35	NENE
43047365050000	LOVE 1121-2B	11S	21E	02	NWNE
43047394050000	LOVE UNIT 1121-10NT	11S	21E	10	SESW
43047393910000	LOVE UNIT 1121-3NT	11S	21E	03	SWSW
43047388240000	LOVE UNIT 1122-18C	11S	22E	18	NENW
43047388250000	LOVE UNIT 1122-18J	11S	22E	18	NWSE
43047388260000	LOVE UNIT 1122-18K	11S	22E	18	NESW
43047396050000	LOVE UNIT 1122-18L	11S	22E	18	NWSW
43047396030000	LOVE UNIT 1122-19C	11S	22E	19	NENW
43047386310000	MULLIGAN 823-23H	08S	23E	23	SENE
43047387130000	MULLIGAN 823-24O	08S	23E	24	SWSE
43047393730000	NBU 1020-1KT	10S	20E	01	NESW
43047393740000	NBU 1020-24BT	10S	20E	24	NWNE
43047393760000	NBU 1021-11I	10S	21E	11	NESE
43047393800000	NBU 1021-11M	10S	21E	11	SWSW
43047393790000	NBU 1021-11P	10S	21E	11	SESE
4304739383	NBU 1021-12A	10S	21E	12	NENE
43047393860000	NBU 1021-12L - STATE	10S	21E	12	NWSW
43047393840000	NBU 1021-12N	10S	21E	12	SESW
43047395470000	NBU 1021-15F	10S	21E	15	SENW
43047395460000	NBU 1021-15L	10S	21E	15	NWSW
43047395630000	NBU 1021-15P	10S	21E	15	SESE
43047395260000	NBU 1021-20G STATE/FED	10S	21E	20	SWNE
43047395340000	NBU 1021-20J STATE/FED	10S	21E	20	NWSE
43047395330000	NBU 1021-20K STATE/FED	10S	21E	20	NESW
43047395320000	NBU 1021-20L STATE/FED	10S	21E	20	NWSW
43047395310000	NBU 1021-20O STATE/FED	10S	21E	20	SWSE
43047375280000	NBU 1021-21C (FKA C275)	10S	21E	21	NENW
43047367020000	NBU 1021-21H	10S	21E	21	SENE
43047395500000	NBU 1021-22A	10S	21E	22	NENE
43047394030000	NBU 1021-23FT	10S	22E	23	SENW
43047395600000	NBU 1021-23L	10S	21E	23	NWSW
43047395780000	NBU 1021-25F	10S	21E	25	SENW
43047395750000	NBU 1021-25J	10S	21E	25	NWSE
43047395610000	NBU 1021-25K	10S	21E	25	NESW

43047395800000	NBU 1021-26D	10S	21E	26	NWNW
43047395790000	NBU 1021-26E	10S	21E	26	SWNW
43047379680000	NBU 1021-6C	10S	21E	06	NENW LOT 3
43047379670000	NBU 1021-6D	10S	21E	06	NWNW LOT 4
43047379410000	NBU 1021-7B	10S	21E	07	NWNE
43047401850000	NBU 921-31BT	09S	21E	31	NWNE
43047363950000	NBU 921-33K	09S	21E	33	NESW
4304740038	HATCH 923-13A	09S	23E	13	NENE
4304740060	HATCH 923-13ED	09S	23E	13	SWNW
4304740059	HATCH 923-13O	09S	23E	13	SWSE
4304740061	HATCH 923-14M	09S	23E	14	SWSW
4304740143	HATCH 923-14O	09S	23E	14	SWSE
4304740064	HATCH 923-15B	09S	23E	15	NWNE
4304740062	HATCH 923-15L	09S	23E	15	NWSW
4304740063	HATCH 923-15P	09S	23E	15	SESE
4304740065	HATCH 923-24O	09S	23E	24	SWSE
4304740069	HATCH 923-25A	09S	23E	25	NENE
4304740068	HATCH 923-25I	09S	23E	25	NESE
4304740070	HATCH 923-25O	09S	23E	25	SWSE
43047388010000	FEDERAL 1022-15H	10S	22E	15	SENE
4304739388	FEDERAL 1022-15K	10S	22E	15	NESW
43047389240000	FEDERAL 1022-15L	10S	22E	15	NWSW



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal.html>



APR 13 2012

IN REPLY REFER TO:
3160 (UTG011)

Julie Jacobson
Anadarko Petroleum Corporation
Kerr McGee Oil & Gas Onshore LP
1099 18th Street, Suite 600
Denver, CO 80202

43 047 38924

Re: Notice of Expiration
Well No. Federal 1022-15L
NWSW, Sec. 15, T10S, R22E
Uintah County, Utah
Lease No. UTU-01196-A

Dear Ms. Jacobson:

The Application for Permit to Drill (APD) for the above-referenced well was approved on November 25, 2008. No extension request of the original APD was received. According to our records, no known activity has transpired at the approved location. In view of the foregoing, this office is notifying you that the approval of the referenced application has expired. If you intend to drill at this location in the future, a new Application for Permit to Drill must be submitted.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact Cindy Severson at (435) 781-4455.

Sincerely,

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

cc: UDOGM

RECEIVED

MAY 02 2012

DIV OF OIL, GAS, & MINING